


## FOUNDATION REQUIREMENTS

ALL FOUNDATION SPECIFICATIONS SHALL BE CONSTRUED AS RECOMMENDATIONS ONLY. BECAUSE OF THE MANY VARIABLE CONDITIONS IN AN ACTUAL INSTALLATION, GRAIN SYSTEMS, INC. ASSUMES NO LIABILITY FOR RESULTS ARISING FROM THE USE OF SUCH RECOMMENDATIONS.

### SITE PREPARATION

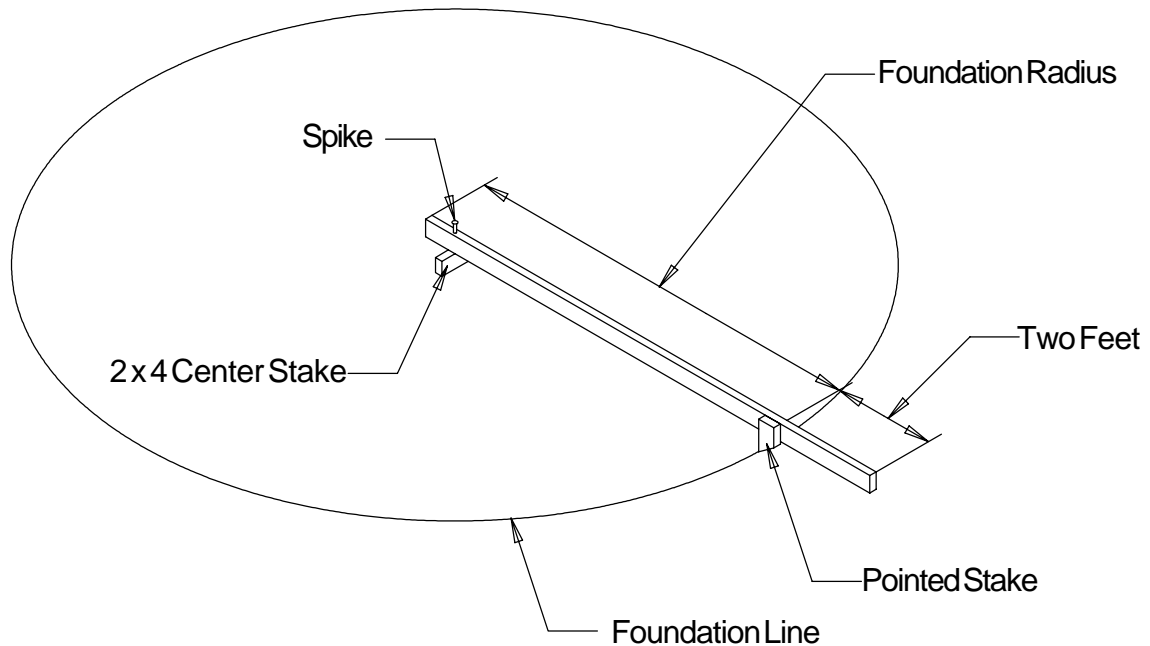

**Figure #1**


#### 1. SELECTING THE PROPER SITE

The selected site should be level, firm, and free from underlying debris. The bin can be installed satisfactorily on slopes, but as the slope increases, additional labor and materials are required for the foundation. The concrete foundation surface must be level. If some fill is required, it should be watered and tamped thoroughly to prevent uneven settling from the weight of the bin. Naturally, the site must allow convenient access for easy loading and unloading, plus provide additional space for future units. Also, consider the positioning of handling equipment, availability of electricity, and the placement of fans, heaters, and gas tanks.

#### 2. SCRIBE THE DIAMETER

Having determined the center of the site, drive a small 2 x 4 in the ground to mark the center point of the foundation. The top of the stake should be the same height as the finished foundation will be. Using one large spike, nail a straight 2 x 4 (approximately 2 feet longer than the radius of the bin) to the top of the center stake. This will enable it to swivel. Along the opposite end at a distance given in the foundation layout table, attach a sharply pointed stake. The swiveling 2 x 4 will act as a compass, enabling you to scribe the correct diameter of your foundation and later locate the anchor and stiffener bolt locations. (NOTE: Making the 2 x 4 two feet longer than the radius will allow the 2 x 4 to also be used as a leveling device and for pulling concrete.)

## CIRCULAR FOUNDATION FORM

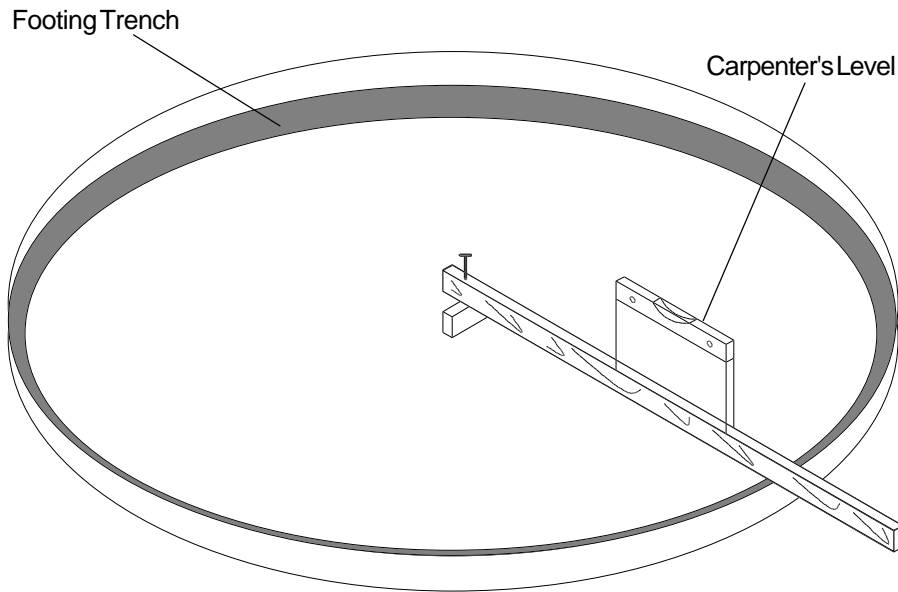

**Figure#2**

### 3. PREPARE THE FOUNDATION


Having scribed the diameter of your foundation, proceed by digging the footing of the foundation. This consists of a large circular trench dug just inside the foundation line. (Refer to foundation details for necessary information.) Once the footing has been dug, you are ready to build the forms. It is important that your form be rigid enough to hold its shape against the poured concrete. Also, the foundation must be flat. Sloped floors cannot be used in drying bins. A carpenter's level placed on top of your 2 x 4 will enable you to set the top of the forms to match the top of the center stake. Check the form work with a transit to ensure a uniform elevation for the entire foundation.

## OCTAGONAL FOUNDATION FORM

There are two styles of foundation forms commonly used. The first is the circular form depicted in Figure #2. The second style can be made of 2" x 8" boards set into a square with corners blocked off to form an octagon. (See Figure #3 below.) This eight sided form will approximate a circle and can be constructed quite easily.

When the foundation form is completed install reinforcement rods by either welding or wiring in place. Place 2" of compacted sand on the inside level of the foundation. The sand is then covered with a 4 mil plastic moisture barrier. 6" x 6" wire mesh (2 mats), covering the entire area of the foundation, completes your preparation of the bin's foundation. You are now ready to begin pouring concrete.

**NOTE: ALL CONCRETE IS TO HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3,000 PSI @ 28 DAYS.**

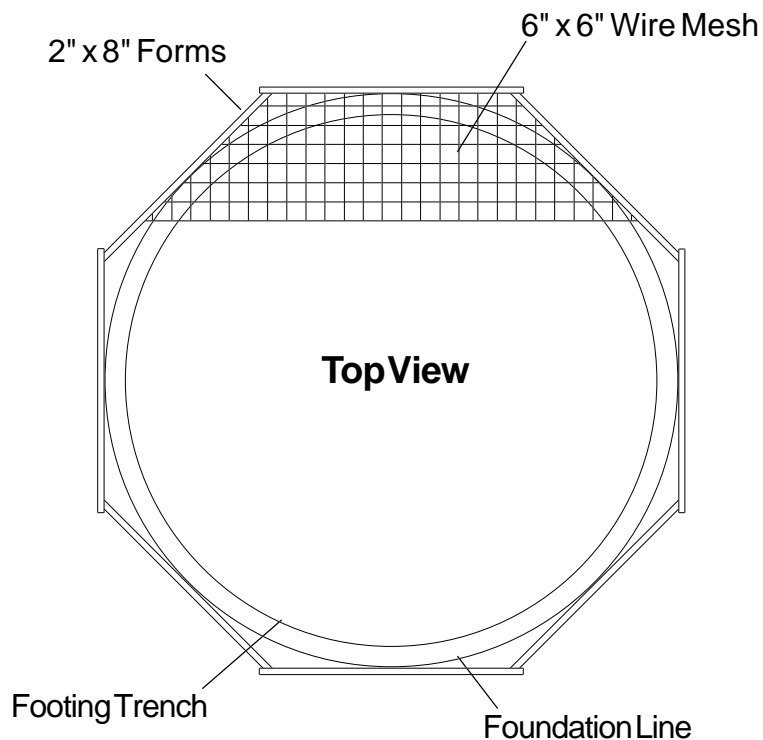

**Figure#3**

FROST FREE PAD

NOTES:

- Foundation site should be well drained and free of vegetation or debris.
- Foundation design is based on a minimum soil bearing capacity of 3,000 lb/ft<sup>2</sup>. If soil bearing capacity is in doubt, contact a local soil testing engineer.
- Concrete shall have a minimum compressive strength of 3,000 PSI at 28 days.
- Requirements for reinforcement do not include overlap.
- Lap all circumferential bars 35 bar diameters and stagger all laps in plan 3'-0".
- All material used for back fill inside the ring wall should be a clean, well graded, crushed stone or sand-gravel mixture. Back fill should be placed in 6" lifts and well compacted.

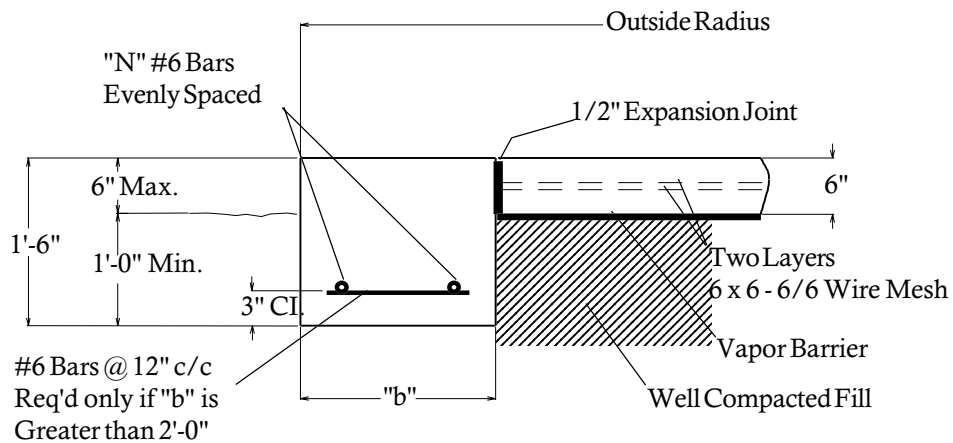


Figure #4

### 24' Diameter Bin


| Ring Number              | 4 & 5  | 6 & 7  | 8 & 9  | 10 & 11 |
|--------------------------|--------|--------|--------|---------|
| b                        | 1'-1"  | 1'-9"  | 2'-6"  | 3'-3"   |
| N                        | 2      | 2      | 3      | 3       |
| Outside Radius           | 12'-9" | 12'-9" | 13'-2" | 13'-6"  |
| Sq. Ft. Mesh 6 x 6 - 6/6 | 900    | 900    | 900    | 900     |
| Length of #6 Bars        | 200    | 200    | 400    | 500     |
| Total Cubic Yd. Concrete | 13     | 15     | 18     | 22      |

## ANCHOR BOLT LAYOUT

Refer to following diagram for proper bolt layout.

Having poured and leveled the concrete, use the center stake and straight 2" x 4" again to find bolt circle radius for the outside stiffener bolts. Select a starting point and stretch a pre-measured chord along the imaginary circle formed by the bolt circle radius. Consider the placement of these bolts so as not to interfere with the positions of bin doors and transitions.

Work both directions from first anchor bolt location, this will help eliminate possible error in laying out anchor bolts. On larger bins sight across starting anchor bolt and center pin and place anchor bolt on opposite side of anchor bolt radius. From this point you can work both directions from both anchor bolts.

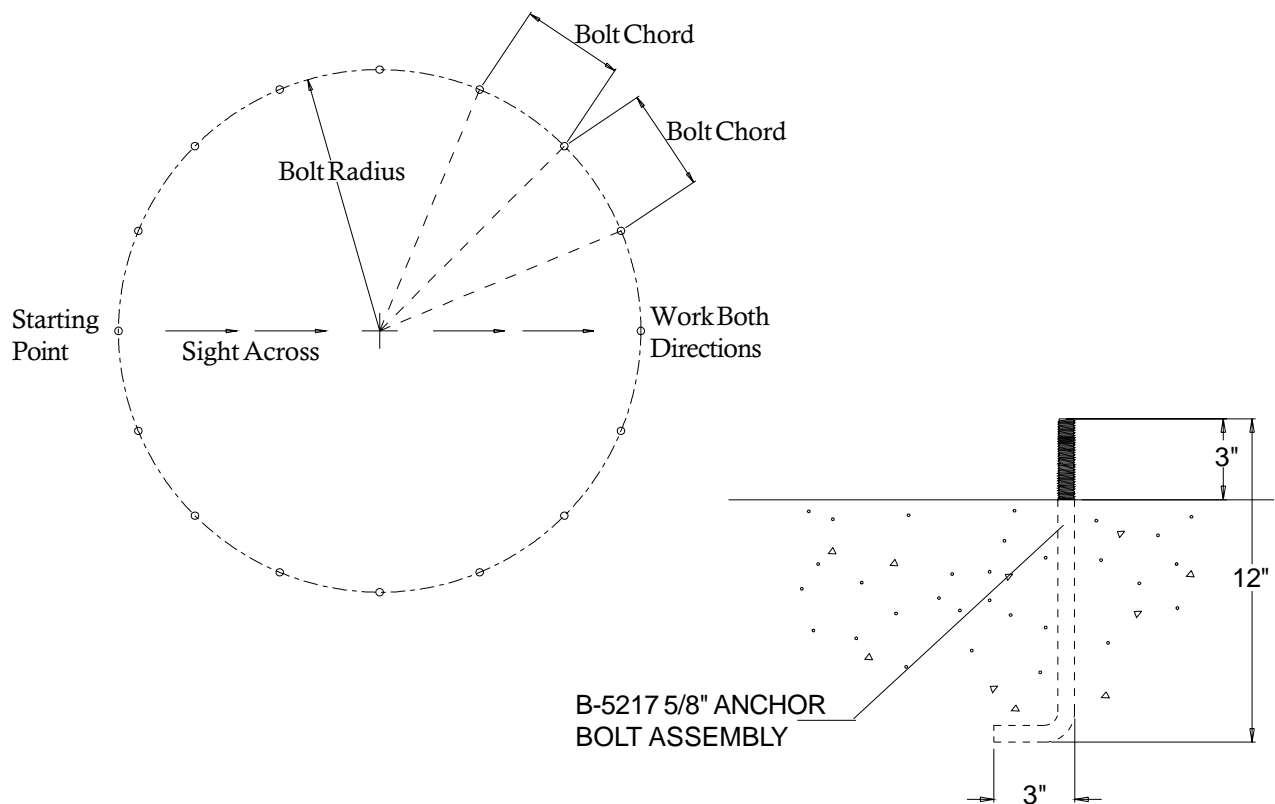


**Figure #5**  
5/8" Anchor Bolt Detail

| Bin Diameter | Bolt Circle Radius | Number of Anchors | Bolt Chord Distance |
|--------------|--------------------|-------------------|---------------------|
| 24'          | 12'-2.7/8"         | 16                | 4'-9.5/16"          |




## **HARDWARE/BOLTING REQUIREMENTS**


NOTE: Grade 2 bolts are designated with a plain head.




NOTE: Grade 5 bolts are designated by 3 slash marks on the head.  
All 5/16" diameter bolts are to be Grade 5 or higher.



NOTE: Grade 8 bolts are designated by 6 slash marks on the head.



NOTE: Grade 8.2 bolts are designated by 6 slash marks on the head in a sunrise pattern.  
All 3/8" diameter bolts are to be Grade 8 or 8.2.



IMPORTANT: Do not tighten bolts to exceed the torque specifications listed below.

| BOLT SIZE  | TORQUE (ft. lb.) |         |
|------------|------------------|---------|
|            | MINIMUM          | MAXIMUM |
| 5/16" - 18 | 15               | 20      |
| 3/8" - 16  | 35               | 42      |
| 7/16" - 14 | 65               | 72      |
| 1/2" - 13  | 95               | 105     |


**CAUTION: UNDER NO CONDITION SHALL ANY OTHER BOLTS BE SUBSTITUTED FOR THOSE SUPPLIED BY GRAIN SYSTEMS, INC.**

IMPORTANT: HARDWARE USAGE - 20 gauge - 15 gauge sidewall sheets, use 5/16" x 3/4" bolts and nuts. (S-275)


14 gauge and 13 gauge sidewall sheets, use 5/16" X 3/4" bolts and nuts. (S-275)

- Use 5/16" x 1.1/4" (S-277) for attaching floor flashing to the sidewall.

**REFER TO TOP DRY TANK BOLTING REQUIREMENTS  
FOR COMPLETE BOLT USAGE**

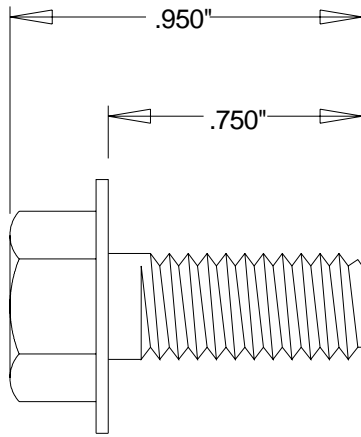

**SIDE VIEW**




**GRADE 5  
TOP VIEW**


**S-275**

.3125" x .750" pre-assembled with a steel backed neoprene washer.

This bolt is used to connect horizontal and vertical seams for 13 gage and thinner sidewall sheets to each other, and to bolt the stiffeners to the sidewall sheets. It is also used in attaching roof panels to the top sidewall sheet and attaching roof panels and flashing to the center collar.

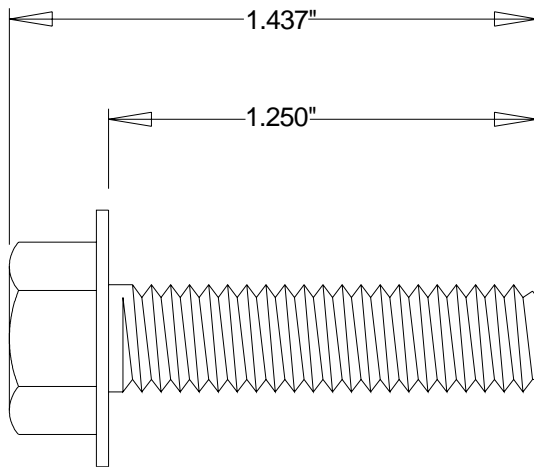

**SIDE VIEW**



**GRADE 5  
TOP VIEW**


**S-277**

.3125" x 1.250" pre-assembled with a steel backed neoprene washer.


This bolt is primarily used to connect roof panels together where they overlap. It is also used at the bottom of the flat bottomed bins to attach the base angle to the sidewall sheet. A small number of these are provided for joints and FC-42076 splice plates for the stiffeners to sidewall connection.

Figure #6


**REFER TO TOP DRY TANK BOLTING REQUIREMENTS  
FOR COMPLETE BOLT USAGE**

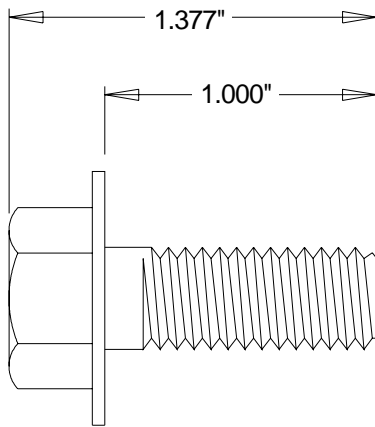

**SIDE VIEW**



**GRADE 8**




**GRADE 8.2**

**TOP VIEW**


**S-7927**

.375" x 1.000" hex flanged head **without** a plastic sealing washer.


This bolt is used to splice the stiffeners together on the flanges. A steel flat washer is used on the nut side of the connection. They are also used on "c" channel splices and mounting "c" channel to wall bracket.

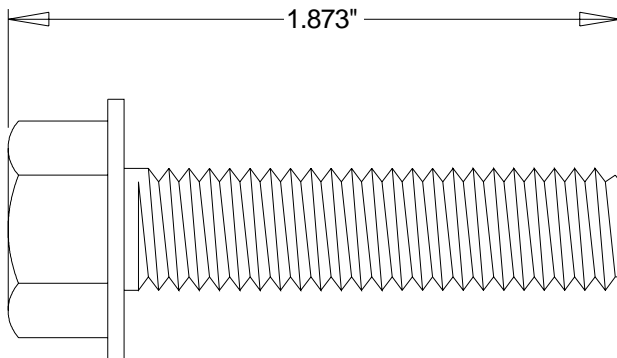

**SIDE VIEW**



**GRADE 8**



**GRADE 8.2**

**TOP VIEW**

**S-7928**

.375" x 1.500" hex flanged head **without** a plastic sealing washer.

This bolt is used to attach the wall bracket to the sidewall and stiffener. A steel flat washer is used on the nut side of the connection.

Note: The only washers shipped loose with the bins are the steel flat washers. The 5/16" steel flat washer (S-845) is used where the base angle attaches to the sheet and some are used at the main eave clips. The 3/8" steel flat washers (S-248) are used at the stiffener splices and some are used in the roof rafter splices.


Figure #7



## LOCATION OF ACCESSORIES

Below is a typical Top Dry bin layout showing suggested locations of Top Dry Accessories. When locating the manway be sure the outside ladder will not interfere with other accessories below. Roof vents should be spaced evenly around the roof. (Quantity will vary with individual systems.)

NOTE: The Top Dry system should be provided with a dependable equipment ground.

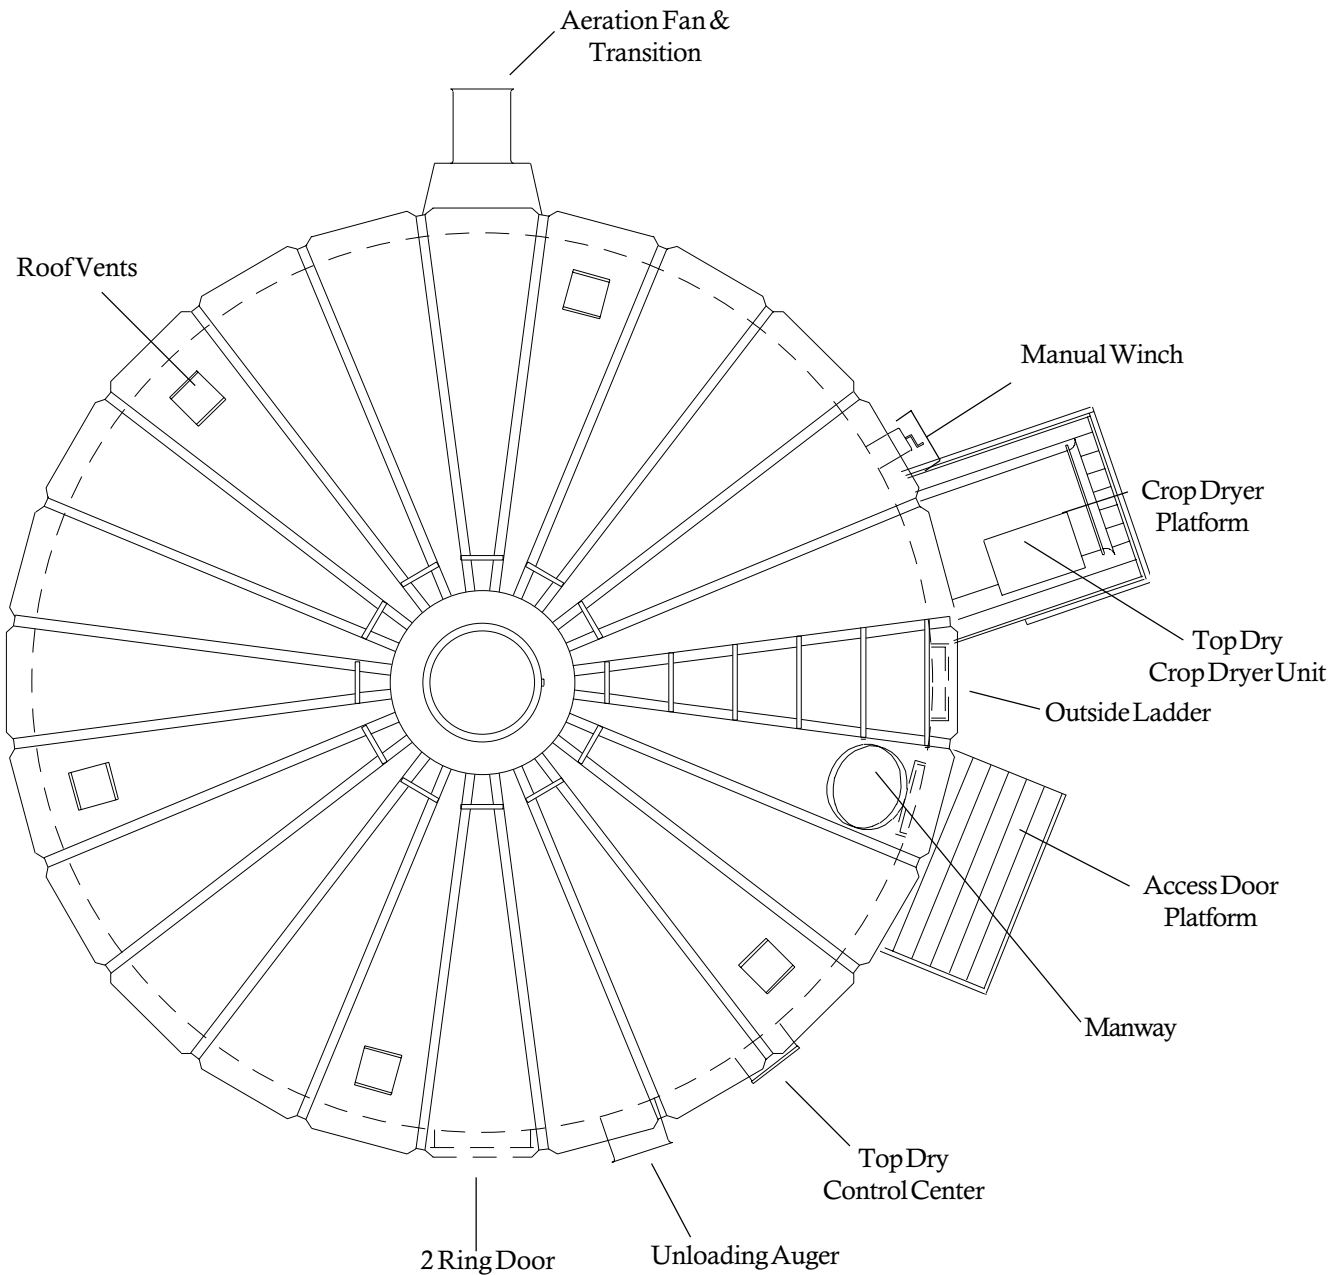


**Figure #8**



# **VERY IMPORTANT**

DC-1174 (Top Decal)

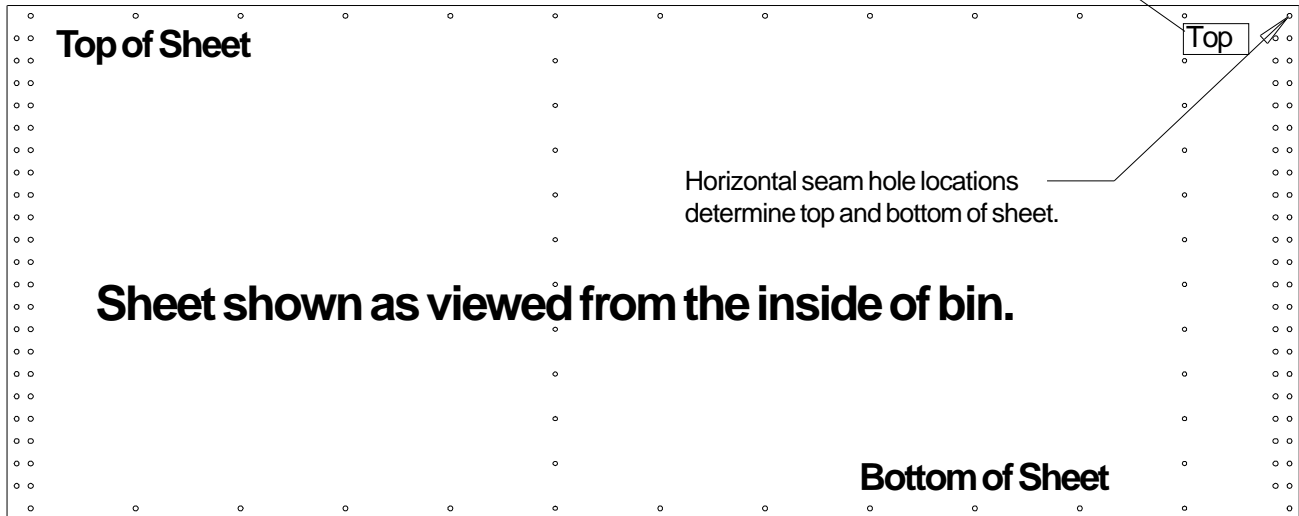

**All 4.00" corrugated sidewall sheets must be placed correctly.**

**All 4.00" corrugated sidewall sheets have a top and bottom!**

**Failure to observe this will not allow the door to fit properly.**

**Carefully review the erection manual and place sidewall sheets as shown.**



## SIDEWALL & STIFFENER GAUGES

Door locations are shown by the underlined sidewall gauges. Actual gauge of the access door sheet located just below the Top Dry floor is in parentheses.

| Top Dry Bin | Sidewall Gauges |           |           |           |           |           |           |           |      |      |      |
|-------------|-----------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------|------|------|
| TDMS24-5    | <u>20</u>       | <u>20</u> | <u>20</u> | 20        | 20        | (16)      |           |           |      |      |      |
| TDMS24-6    | <u>20</u>       | <u>20</u> | 20        | <u>20</u> | 20        | 20        | (16)      |           |      |      |      |
| TDMS24-7    | <u>18</u>       | <u>20</u> | 20        | 20        | <u>20</u> | 20        | 20        | (16)      |      |      |      |
| TDMS24-8    | <u>18</u>       | <u>18</u> | 20        | 20        | 20        | <u>20</u> | 20        | 20        | (16) |      |      |
| TDMS24-9    | <u>17</u>       | <u>18</u> | 18        | 20        | 20        | 20        | <u>20</u> | 20        | 20   | (16) |      |
| TDMS24-10   | <u>17</u>       | <u>17</u> | 18        | 18        | 18        | 20        | 20        | <u>20</u> | 20   | 20   | (16) |

### 24' Stiffener Layout

| Odd Ring |      |  |  | Even Ring |       |
|----------|------|--|--|-----------|-------|
| Gauge    | Ring |  |  | Ring      | Gauge |
| 16       | 1    |  |  | 1         | 16    |
| 16       | 2    |  |  | 2         | 16    |
| 16       | 3    |  |  | 3         | 14    |
| 14       | 4    |  |  | 4         |       |
|          | 5    |  |  | 5         | 12    |
| 12       | 6    |  |  | 6         |       |
|          | 7    |  |  | 7         | 10    |
| 10       | 8    |  |  | 8         |       |
|          | 9    |  |  | 9         | 8     |
|          |      |  |  | 10        |       |

All Top Dry bin stiffeners are mounted on the outside of the bin. See stiffener instructions for stiffener joint details and stiffener to sidewall attachment.

Figure #9



## OUTSIDE STIFFENERS

- The XX in the part numbers at the bottom will identify the Stiffener's gauge.
- Example: FC-4205714 is a 2-Ring Standard Stiffener 14 Gauge.

| Stiffener Description | Part No.   | Overall Length | Color Code |
|-----------------------|------------|----------------|------------|
| 2-Ring 10 Ga. (Base)  | FC-4207210 | 94 27/32"      | White      |
| 2-Ring 12 Ga. (Base)  | FC-4207212 | 94 27/32"      | Black      |
| 2-Ring 14 Ga. (Base)  | FC-4207214 | 94 27/32"      | Green      |
| 2-Ring 16 Ga. (Base)  | FC-4207216 | 93 13/16"      | Blue       |
| 2-Ring 8 Ga. (Base)   | FC-4207308 | 88 3/16"       | Yellow     |
| 2-Ring 8 Ga.          | FC-4206308 | 87 15/16"      | Yellow     |
| 2-Ring 10 Ga. Trans.  | FC-42062   | 94 19/32"      | Purple     |
| 2-Ring 12 Ga.         | FC-4205712 | 94 19/32"      | Black      |
| 2-Ring 14 Ga.         | FC-4205714 | 94 19/32"      | Green      |
| 2-Ring 16 Ga.         | FC-4207516 | 93 9/16"       | Blue       |
| 2-Ring 18 Ga.         | FC-4207518 | 93 9/16"       | Orange     |
| 2-Ring 16 Ga. Top     | FC-4206516 | 85 9/16"       | Blue       |
| 2-Ring 18 Ga. Top     | FC-4206518 | 85 9/16"       | Orange     |
| 1-Ring 12 Ga.         | FC-4205912 | 50 19/32"      | Black      |
| 1-Ring 14 Ga.         | FC-4205914 | 50 19/32"      | Green      |
| 1-Ring 16 Ga.         | FC-4207416 | 49 9/16"       | Blue       |
| 1-Ring 18 Ga.         | FC-4207418 | 49 9/16"       | Orange     |
| 1-Ring Top 16 Ga.     | FC-4206616 | 41 7/16"       | Blue       |
| 1-Ring Top 18 Ga.     | FC-4206618 | 41 7/16"       | Orange     |
| Splice                | FC-42076   | 10 11/16"      | ---        |


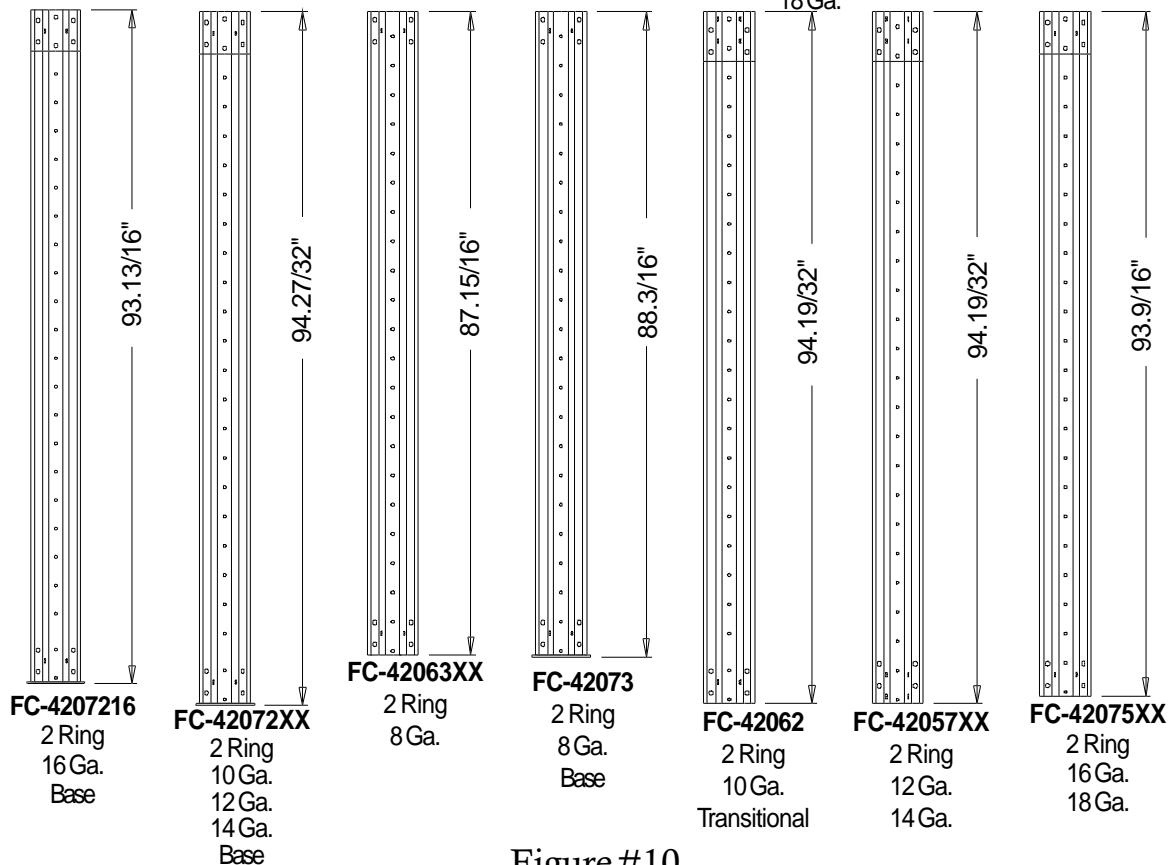



Figure #10

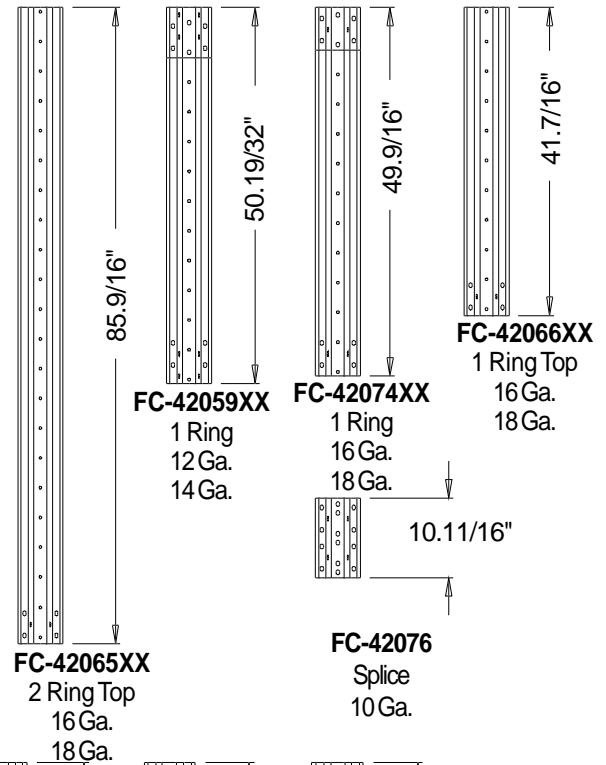

## TOP STIFFENER STARTING LOCATION

Refer to Figure #11, for proper location of top stiffeners. On the overlap of the stiffeners, and on the splice, use 3/8" x 1" hex bolts, a washer on the nut side connection. Refer to the stiffener layout, Figure #9, for stiffener usage.


All stiffeners are outside the bin wall. Use 5/16" x 3/4" Grade 5 bin bolts with head and neoprene washer to the inside of the bin wall. Refer to proper charts and illustrations on the previous two pages for proper location of stiffeners and sidewall sheets.

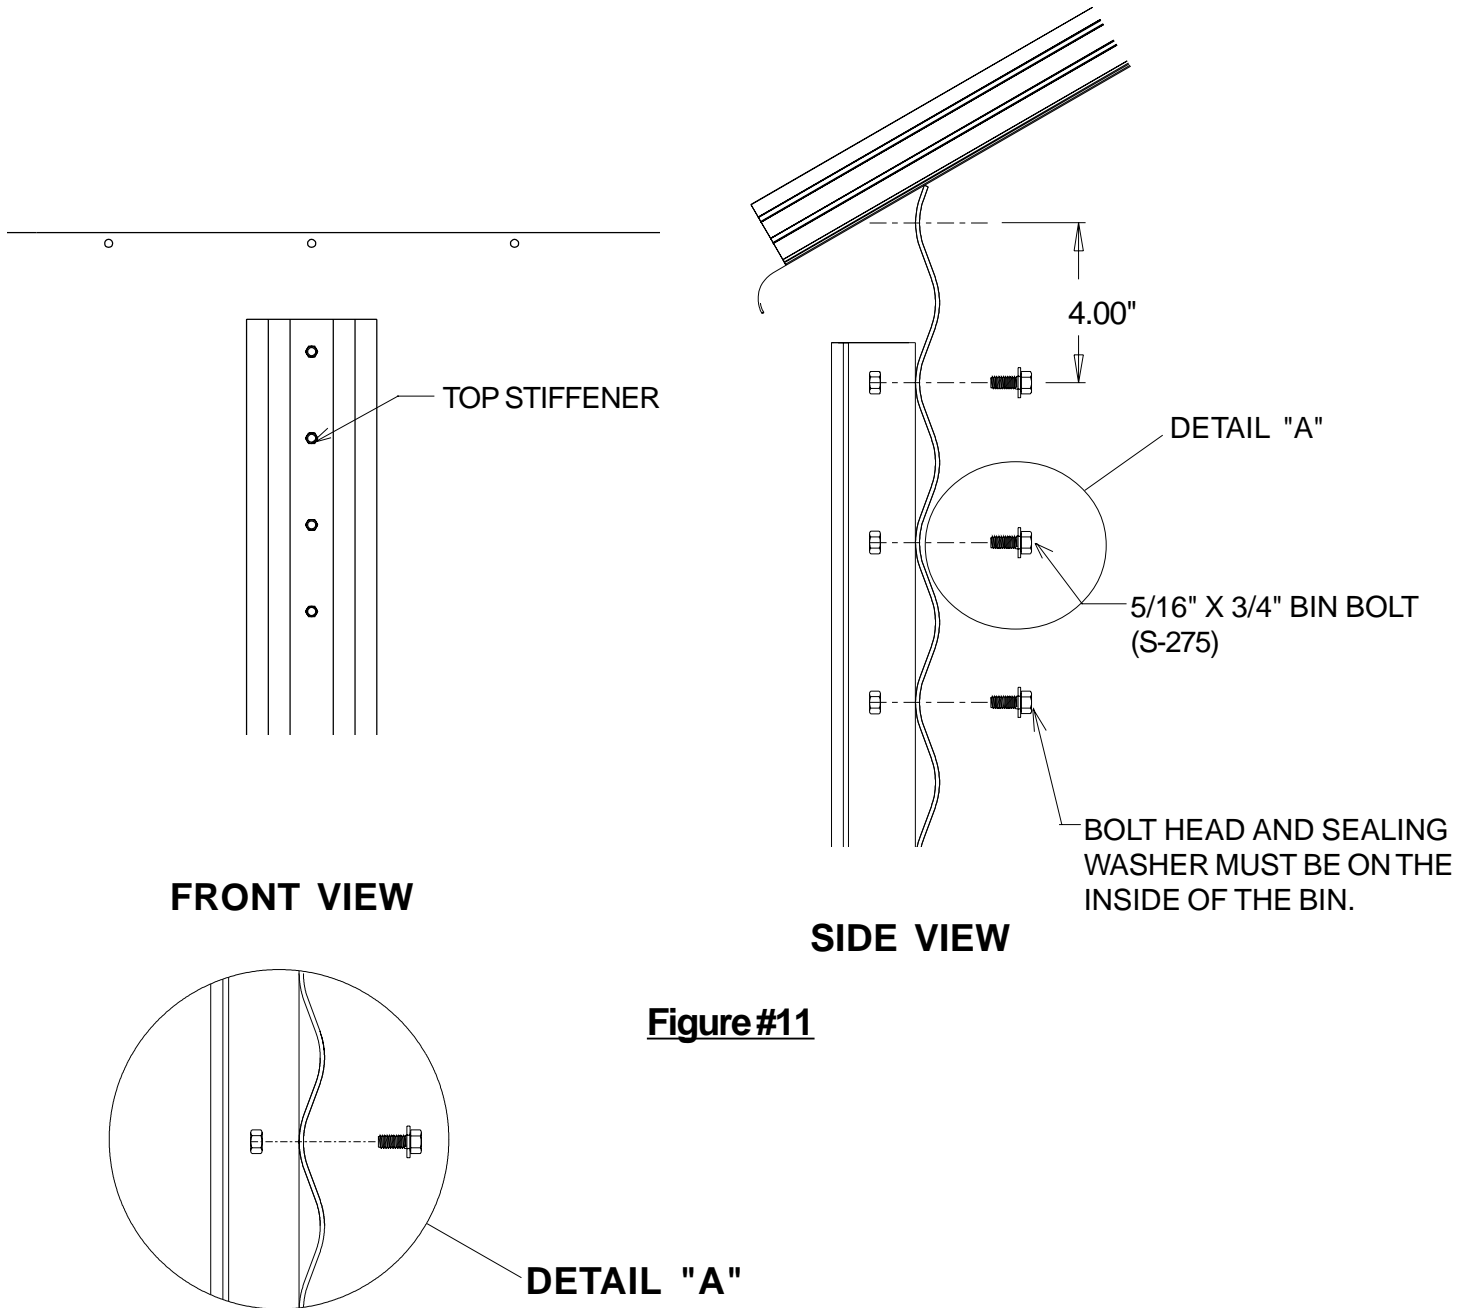

## STIFFENER SPLICE DETAILS

When installing bottom stiffeners, you may find that in some cases the stiffener with base plate attached will not rest on the foundation (due to unlevel concrete, etc.) Shim plates have been furnished and should be used to fill opening between base plate and concrete.

**IMPORTANT:** If shim plates are not used where required, the downward pressure of the stiffeners will not be transferred directly to the foundation, and bin failure could result.

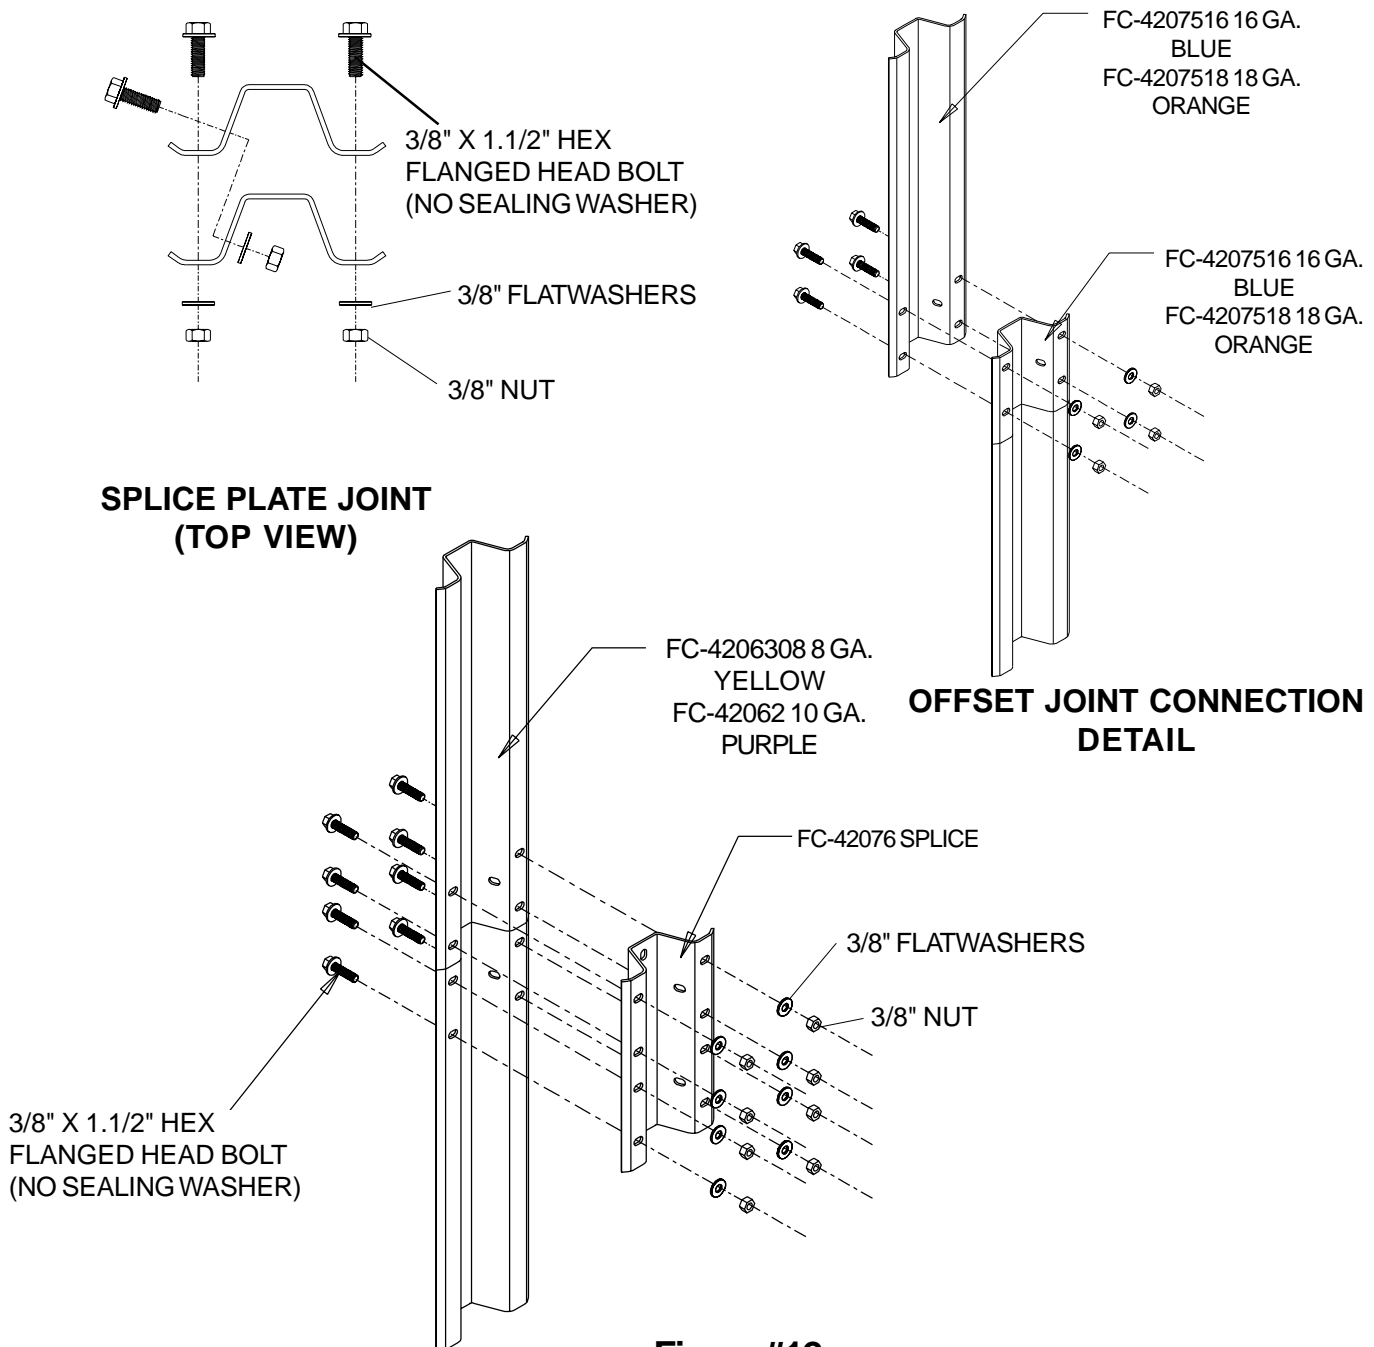

**Figure #12**



## BOLTING REQUIREMENTS

### 2 STIFFENERS PER SIDEWALL SHEET

| Sidewall Gauge | Horizontal Seam      | Vertical Seam        | Stiffener To Sidewall | Overlap Seam        |
|----------------|----------------------|----------------------|-----------------------|---------------------|
| 17 Thru 20     | 5/16" x 3/4"<br>[10] | 5/16" x 3/4"<br>[42] | 5/16" x 3/4"<br>[20]  | 5/16" x 3/4"<br>[2] |

All bolts are standard bin bolts with neoprene washers. For horizontal and vertical seam bolts, the bolt head and neoprene washers are on the outside of the bin.

Note: For the splice plates FC-42076 use 5/16" x 1.1/4" bolts for the stiffener to sidewall connections.

Standard (17 Gauge Thru 20 Gauge) Sheet Bolting Detail  
(Viewed from outside of the bin)


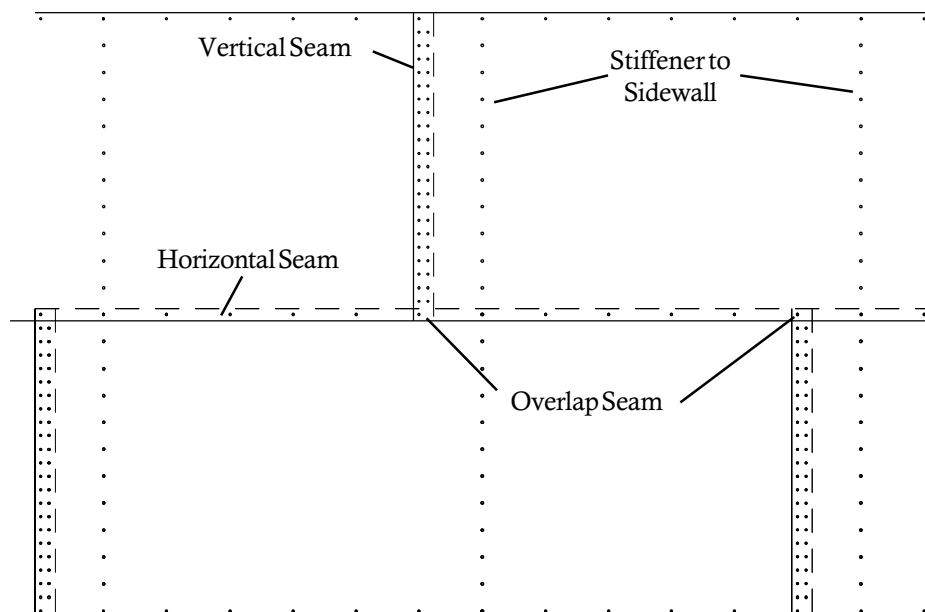


Figure #13

## STIFFENER & SEAM LOCATIONS

Even Ring Bins

Odd Ring Bins

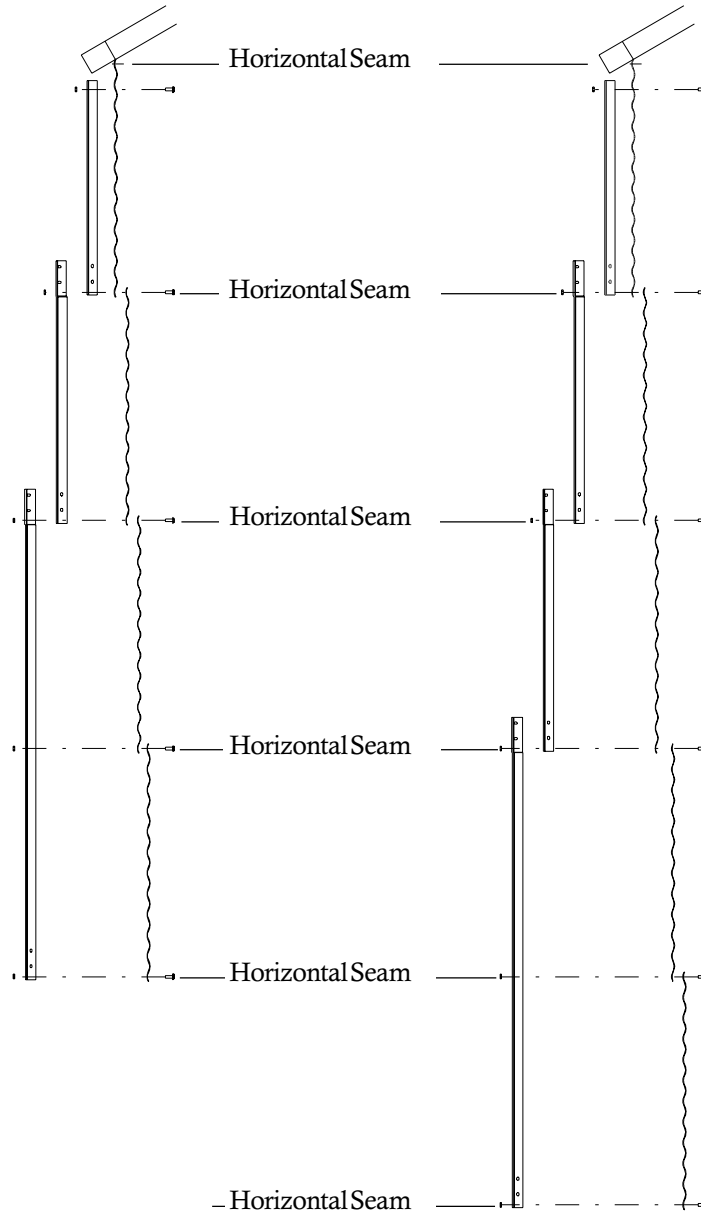

2 stiffeners per sidewall sheet  
Top Dry stiffener starting location -18' to 36'  
4" corrugation stiffener only

Figure #14





| GAUGE | COLOR CODE      |
|-------|-----------------|
| 22    | White           |
| 20    | Red             |
| 19    | Black/Yellow    |
| 18    | Orange          |
| 17    | Pink/Light Blue |
| 16    | Blue            |
| 15    | Brown/Red       |
| 14    | Green           |
| 13    | Yellow/Blue     |
| 12    | Black           |
| 11    | Pink            |
| 10    | Light Blue      |
| 9     | Blue/Orange     |
| 8     | Yellow          |


Note: The rope caulking is installed before each sheet is assembled. Apply rope caulking between the last vertical row of bolts and edge of outside sheet. There is sufficient caulking for all vertical seams on storage and drying bins. Wipe sheet clean where caulking is to be applied.

Before bolting the sidewall sheets together, check that you have the proper gauge steel for the first ring. The higher gauge numbers denote the thinner materials. (For example: 20 gauge material is thinner than 14 gauge.) In erecting Top Dry grain bins the thinnest material always goes on top. The first sidewall ring you assemble will be the second ring from the top of your bin. Check the various gauges of your bin with the Color Code Chart and begin building accordingly.

Once you have selected the proper gauge material, begin assembling the sidewall sheets according to the instructions on the following page.

-For bolting specifications on stiffeners, see Figure #11.


### CAULKING DETAIL

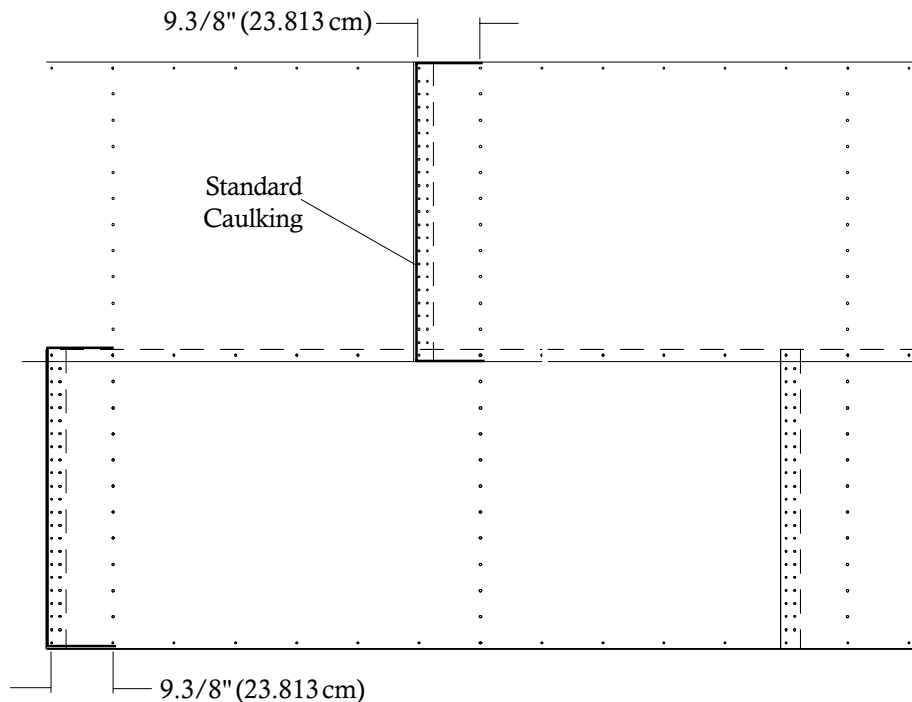

Standard Sidewall Sheets  
As Viewed From Outside

Figure #15

## SIDEWALL CONSTRUCTION INSTRUCTIONS

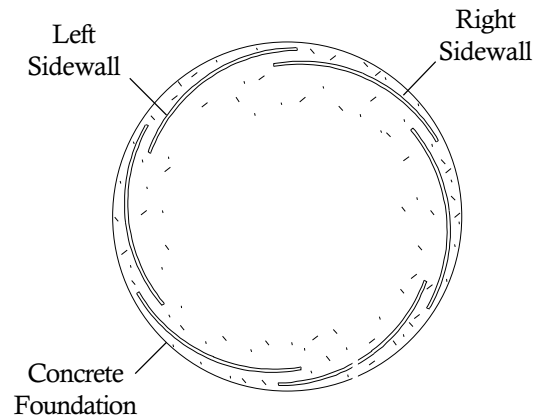


**Figure #16**

Using correct size bin bolts throughout, begin assembling sidewall sheets end to end (overlapping the same way throughout) until the ring is complete. All body sheet bolts are to be installed with the bolt head and its neoprene washer to the outside and the nut on the inside. Do not tighten bolts until all sheets are assembled and form a complete ring. Tighten the bolts in sequence, starting from the center and work to the edge in both directions. This permits the sidewall sheets to draw-up evenly.

After assembling the second ring, lift the top ring sheets in place, add top stiffeners, build the Top Dry floor, then the roof.

Note: The sidewall sheets used for the top ring are punched to accommodate the eave flashing bolts.

Note: The fan entrance sheet and access door are located in the second ring. Attach the top stiffeners, leaving out the (7) bolts indicated in Figure #15 at each stiffener location. Install the flashing bolts from the outside.

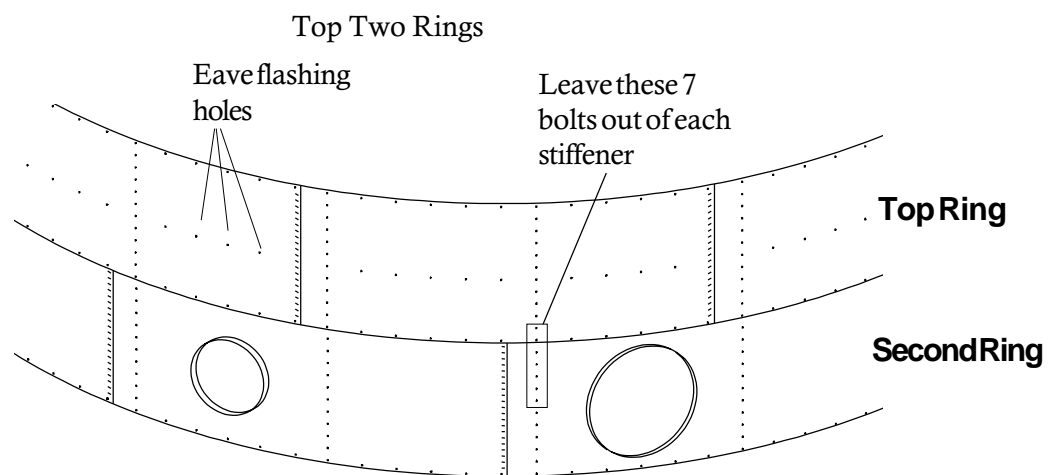

**Figure #17**

## STIFFENER AND BRACKET INSTALLATION

Install the stiffeners on the outside of the bin (as shown in Figure #14) and the wall brackets on the inside of the bin. The wall brackets are to be positioned with the bracket's top hole matching the first hole up from the horizontal seam (not counting the horizontal seam). Bracket to sidewall connection using a 3/8" x 1.1/2" bolt (S-7928), head outside, with a neoprene washer (S-3558) against the wall on the inside, and a corrugation spacer (S-7041).

Note: It may be necessary to ream out sidewall holes with a drill and 3/8" bit for easier installation.

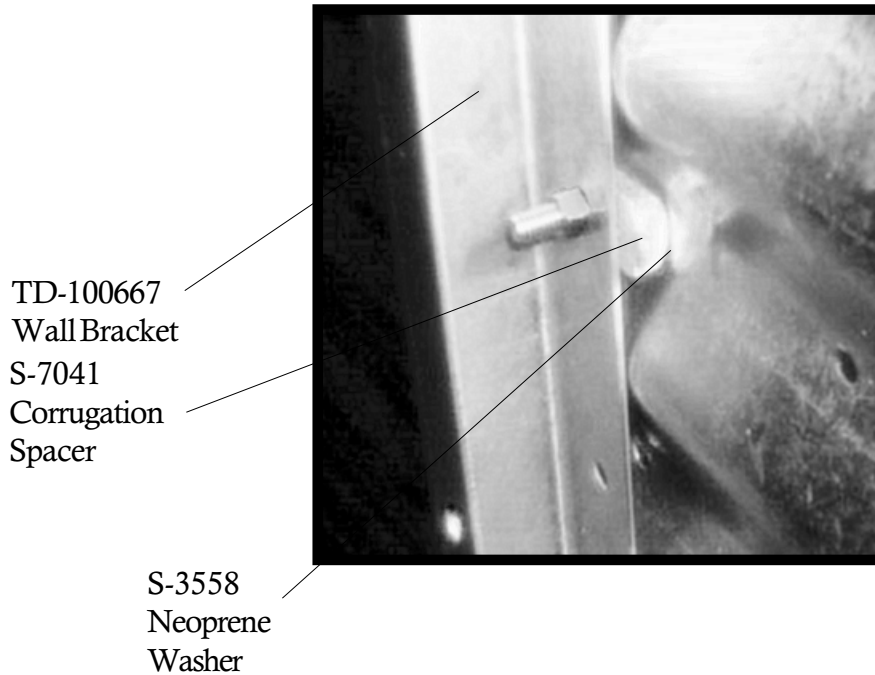


Figure #18

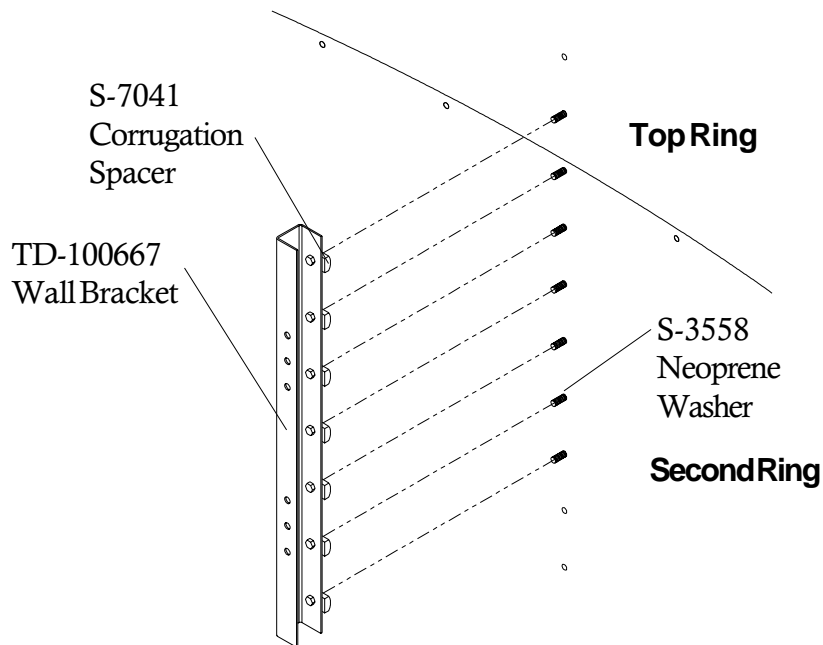


Figure #19

## "C" CHANNEL INSTALLATION

Fasten the rolled "C" eave members to the wall brackets in the upper 2 holes of the top set of three (3) holes leaving the bolts loose.

Install the splice plates at the rolled "C" eave member seams using 3/8" x 1" hex bolts and nuts (Install bolts as shown). Tighten all bolts.

"C" Channel Attachment.

TD-100687  
Eave "C" Channel

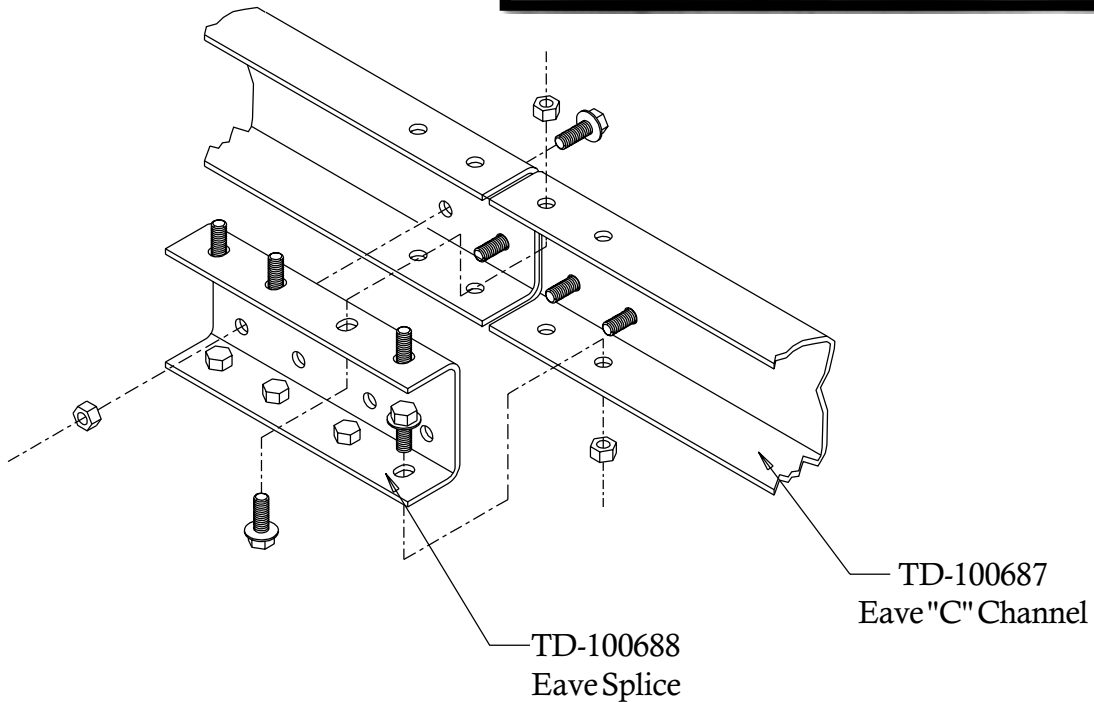
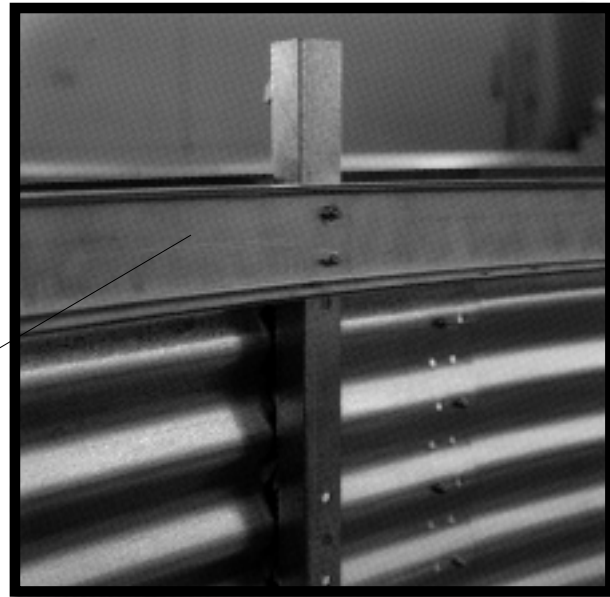


Figure #20

## CENTER COLLAR ASSEMBLY

Add channel braces and brace plates to center collar as shown using 3/8" x 1" bolts and nuts. (Do not attach cross channel until floor is done.)

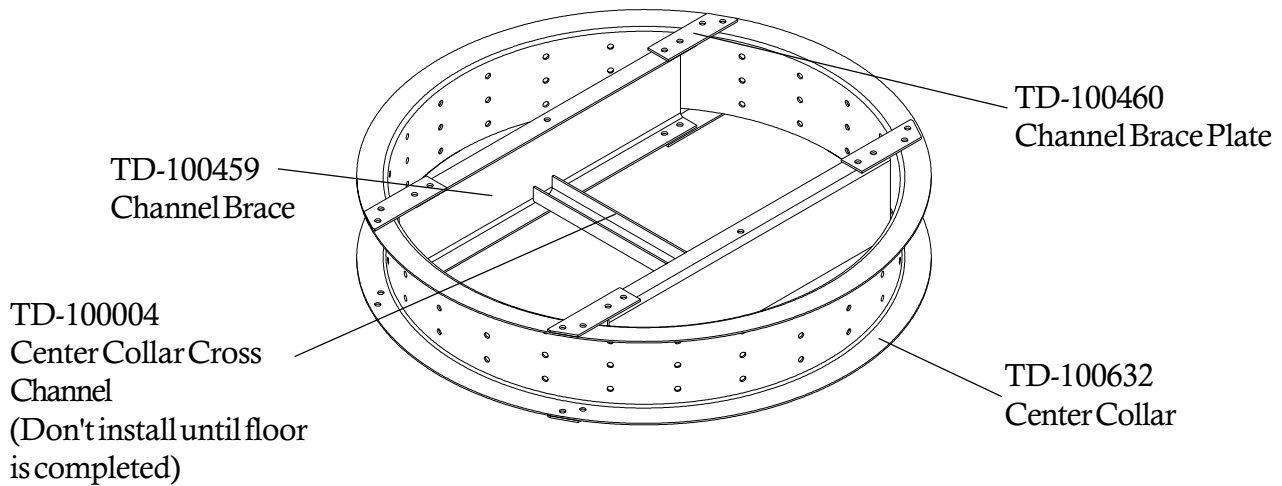


Figure #21

Position the center collar at the center of the bin and raise it to approximately 8'-9.1/2" measuring from the bottom edge of the collar to the concrete.


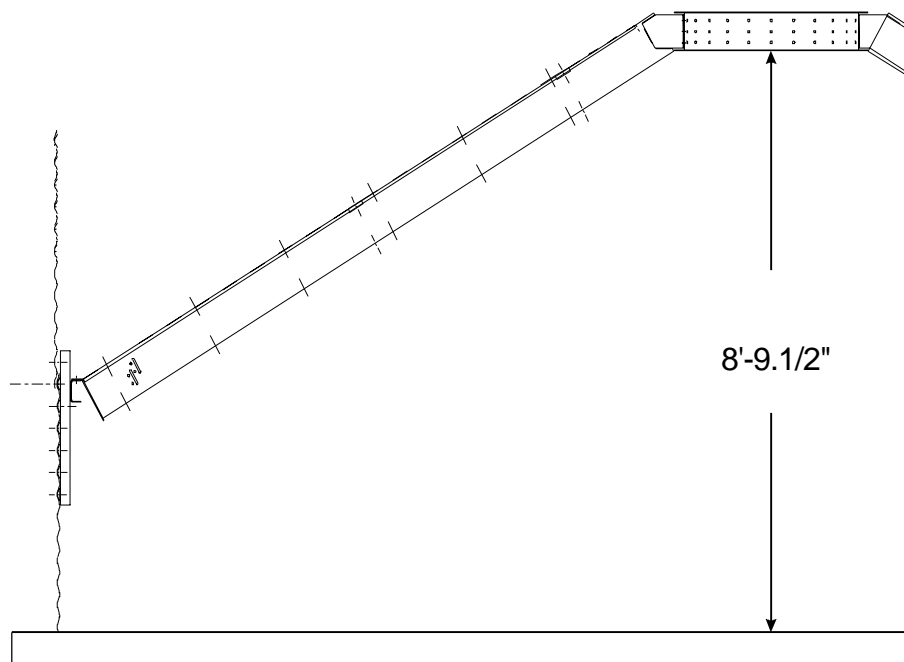


Figure #22

## RAFTER INSTALLATION & FLOOR SUPPORT ANGLE ATTACHMENT

When installing the rafters, set the lower clip end on the "C" eave member. Leave the bolts to the center collar and the eave member loose until all rafters are in place. Use 3/8" x 1" hex bolts and nuts to connect the center collar and eave member with three (3) rafters at 120 degrees to each other. These first three (3) rafters should all face the same direction. Every other rafter should alternate direction. **IMPORTANT:** There are left & right rafters. Be sure to alternate left, right, left, right, etc..

The floor sheet support purlins can now be installed using 5/16" x 3/4" bin bolts. There are two (2) different lengths of purlins to fit between the rafters. Insert the straight tab of the purlin through the upper slot in the left hand rafter when looking toward the bottom of the rafters. Bolt the bent end of the purlin to the right hand rafter in the upper two (2) holes. After inserting the next purlin tab, bolt the first purlin tab to the second purlin. Continue around the bin alternating lengths as the rafter facings did. Tighten all bolts.

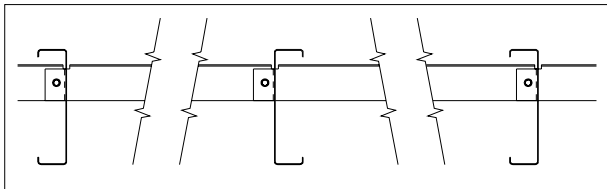

Looking toward the sidewall



Floor Support Angle Assembly

TD-100720 Long  
TD-100721 Short

Figure #23

Counting up from the lower end of the rafter, on the underneath side, the angle purlins bolt in the 3rd hole using 5/16" x 1.1/4" bin bolts. The angle is to be bolted to the underneath side of the rafters, joining rafter to rafter, with the angles interior angle facing the center of the bin. (as shown below). Tighten all bolts.


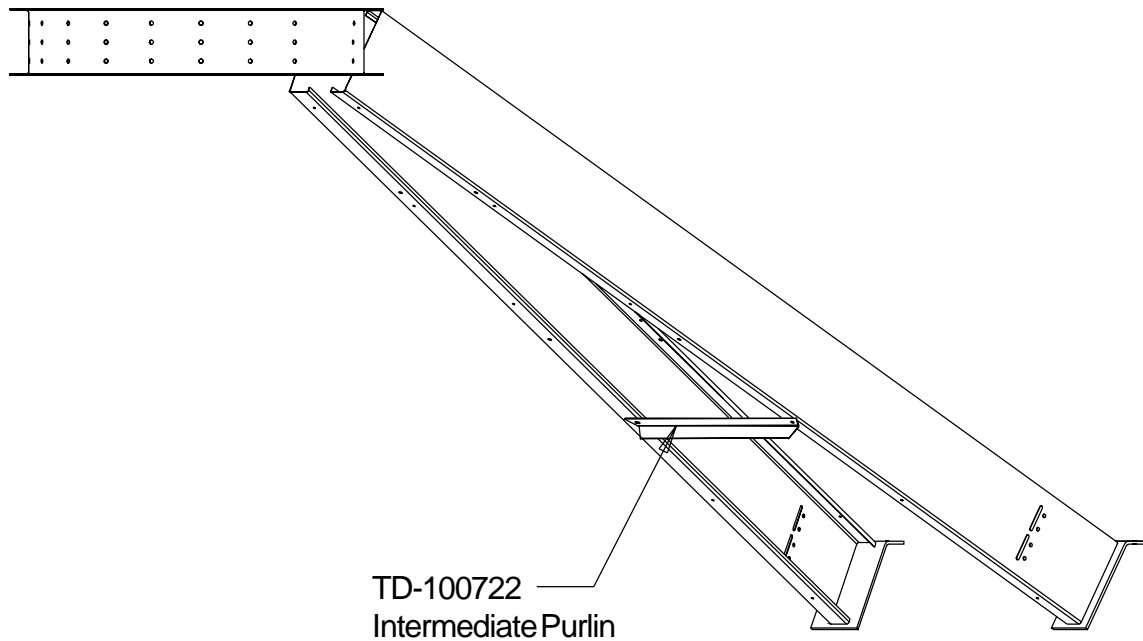


Figure #24

## DUMP HOPPER INSTALLATION


Pre-assemble the dump hoppers, and flashing angles to the floor sheets. Place a dump hopper under the floor sheet and align it with the pre-punched large hole. Place a flashing angle on top of the sheet across the outer edge of the hopper entrance with the interior angle of the angle facing the sidewall. Screw down through the angle, sheet, and hopper with 5/16" x 3/4" self-tapping screws.

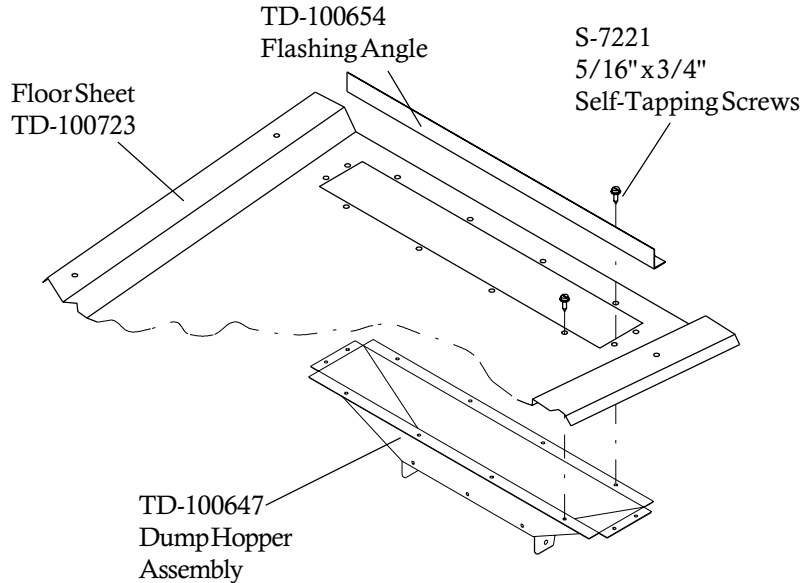

**Figure #25**

## FLOOR SHEET INSTALLATION

Now the assembled sheets can be placed over the rafter framework. As the sheets are placed and overlapped they are to be screwed down to the rafters using 5/16" x 3/4" self-tapping screws, leaving the fourth and eighth holes empty.

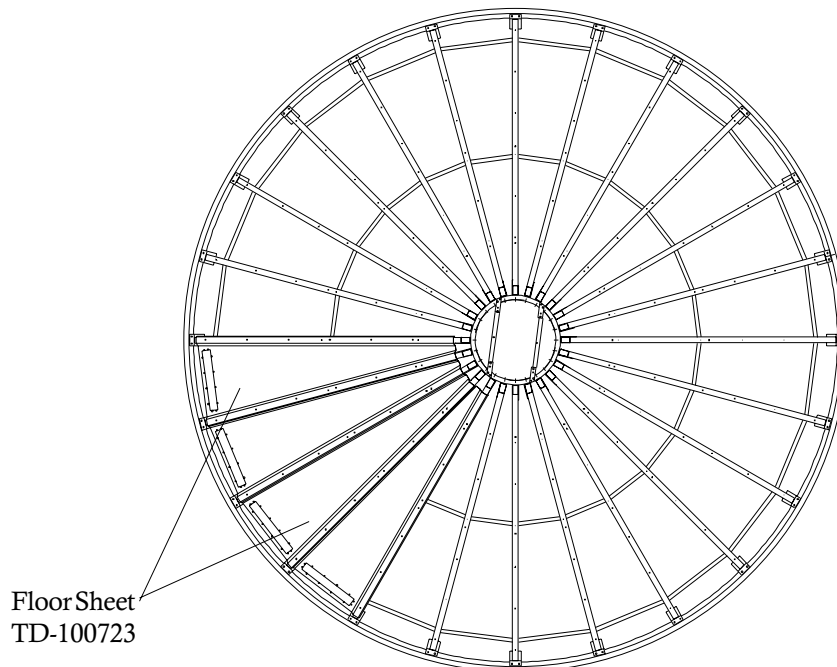

**Figure #26**



## LEVELING BAND POST INSTALLATION

Install the leveling band posts on the floor as shown.

The fourth and eighth holes in the floor sheet indicate the location of the leveling band posts. Attach posts with 5/16" x 1.1/4" bin bolts (S-277). The fourth and eighth holes from the bottom of the sheet, there will be 8 posts (1 every third sheet). In the eighth hole there will be 4 posts (1 every 6th sheet). After all of the posts have been installed fill the unused holes with 5/16" x 1.1/4" bin bolts.


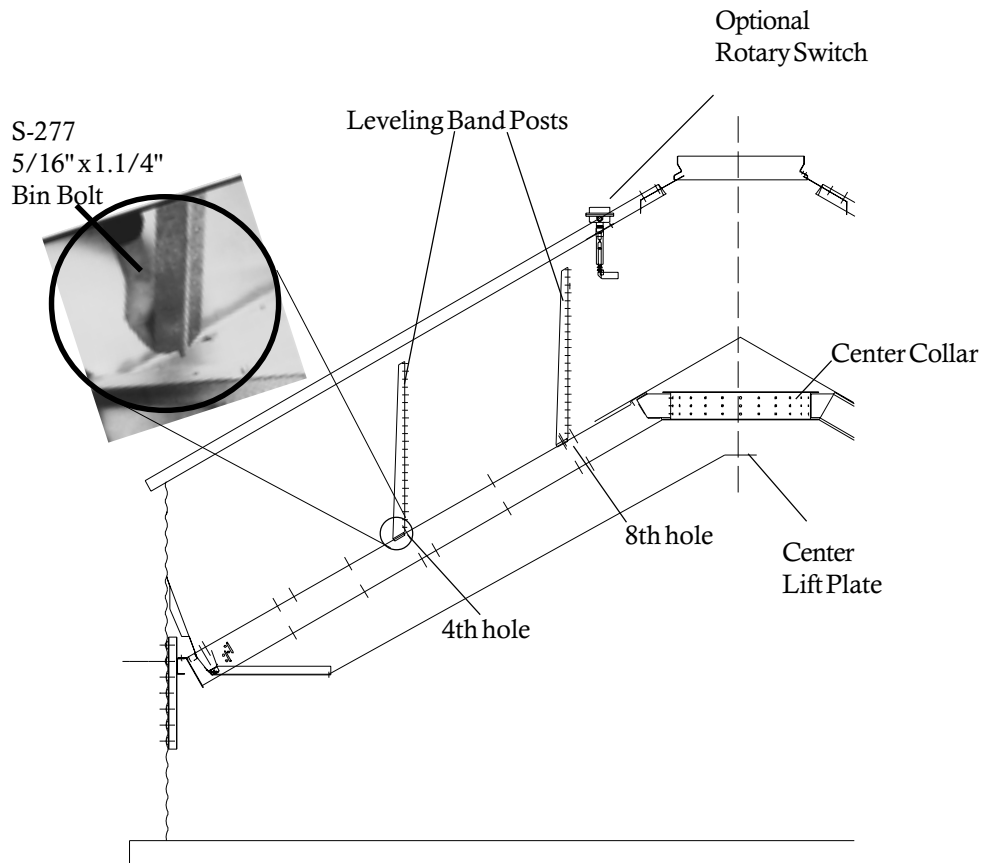


Figure #27

## FLASHING BOLT INSTALLATION

Install the eave flashing bolts (5/16" x 1.1/4") through the sidewall and tighten first nut. Note at the vertical sidewall seams, one bolt is turned around to avoid interference with eave flashing (refer to photo).


Left bolt on the each vertical sidewall seam level with the eave flashing bolts (as viewed from inside the bin) is to be installed bolt in, nut out, as shown in the photo to the right.

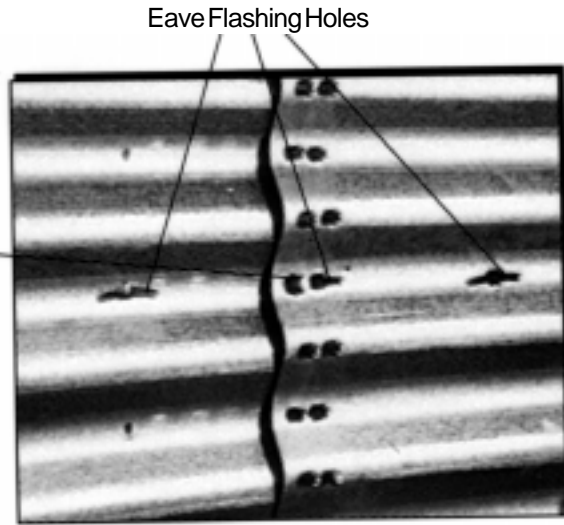


**Figure #28**

## EAVE FLASHING INSTALLATION


Install the eave flashing centered on the floor sheet (1 per) with the bent edge towards the sidewall install a fender washer (S-3671) and nut. Screw the flashing to the flashing angle at the dump hopper opening with (5) #10 self-drilling (S-280) screws and screw the flashing pieces together where they overlap with (3) #10 self drilling (S-280) screws.



#10 Self-Drilling  
Screws (S-280)



Floor Flashing Angle  
(TD-100654)

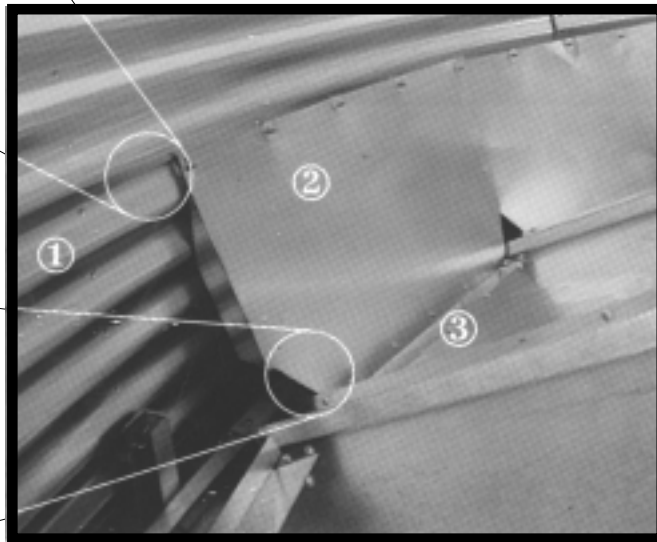

**Figure #29. Flashing Attachment.** 1) Sidewall, 2) Flashing TD-100648, 3) Floor sheet, 4) 5/16" x 1.1/4" bin bolt. Note that there is a nut in between the sidewall sheet and the flashing sheet.

## FLASHING SPLICE INSTALLATION

The flashing splice pieces can now be attached to the eave flashing to seal around the rib of the floor sheet as shown with (S-280) #10 self-drilling screws. The flashing splice is a break apart piece. Attach the center piece in the center so that it rests on top of the floor sheet rib. Break off the side pieces and place them such that they seal against the sides of the ribs and attach each side piece with two screws. Make sure there are no gaps in the flashing.

Top Ring

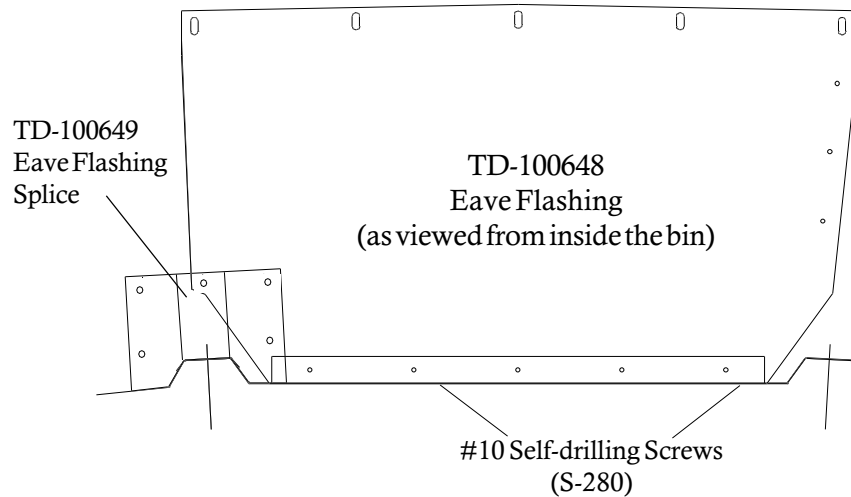


Figure #30

## OUTER DUMP CHUTES

Bolt a TD-100598 angle dam to each dump chute using (3) 1/4" x 5/8" bolts and nuts, as shown below. Use 1/4" x 5/8" bolts and double nuts to fasten dump chutes to hopper. Do not tighten first nut down. Lock second nut to first nut and make sure chutes raise and lower FREELY!


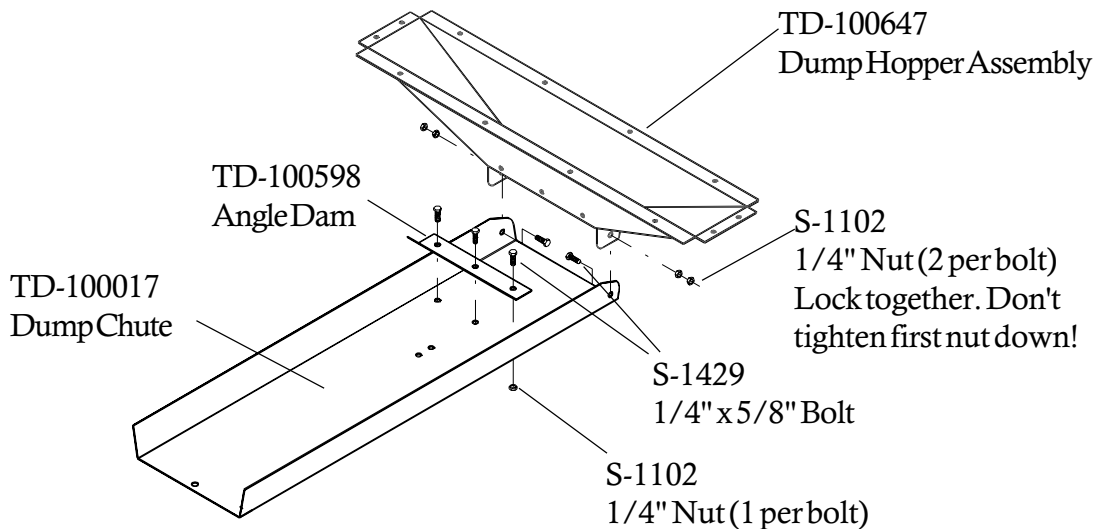


Figure #31


## CENTER CONE ASSEMBLY

Bolt these sections together to form perforated cone as shown below. Use 1/4" x 5/8" bolts and nuts to attach sections together.


Flat Overhead View

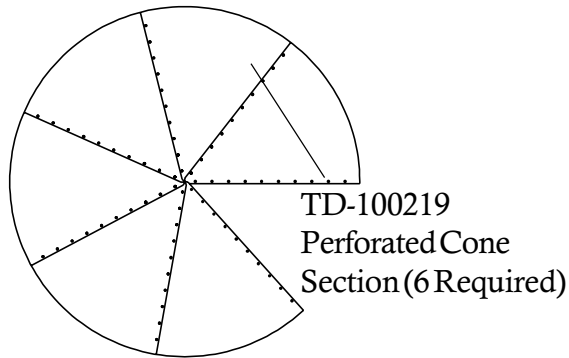

Formed Overhead View

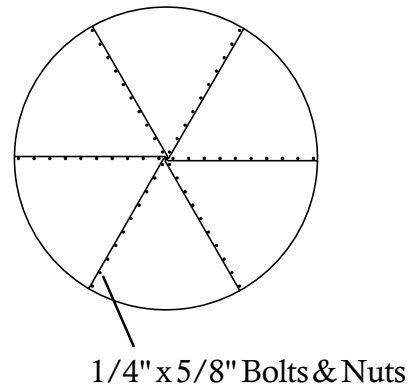

Side Formed View



## CENTER CONE INSTALLATION

Install cone over the center collar. Fasten Cone Assembly with (12) #10 x 3/4" self-drilling screws (S-280).


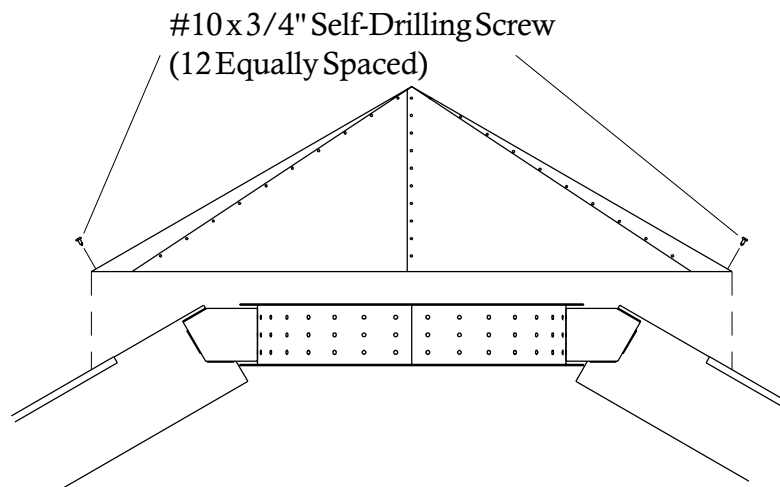


Figure #32

## ROOF ASSEMBLY SPECIAL INSTRUCTIONS

It is now time to assemble the roof. The roof is assembled according to the instructions in the roof hardware box, WITH THE FOLLOWING EXCEPTIONS:

1. Locate eave clips so that a roof sheet will be centered over sidewall ladder.
2. Four eave clip shims per eave clip must be installed.
3. Use TD-100274 Roof Brackets shipped in the Top Dry hardware rather than the brackets shipped in the roof hardware.

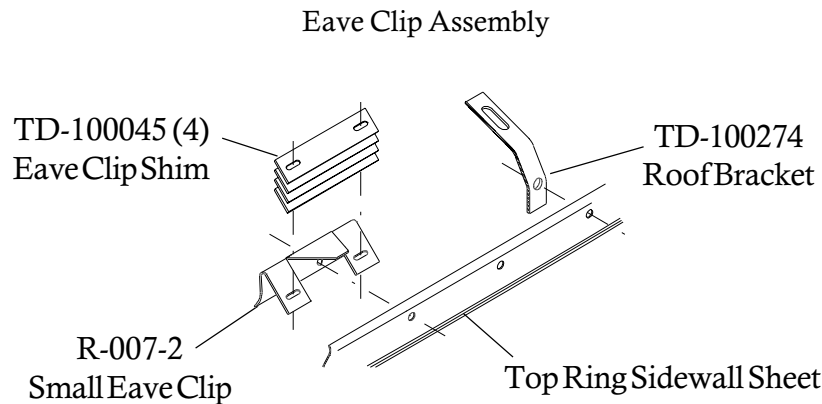


**Figure #33**

## LEVELING BAND LOCATION

Position leveling bands as shown in the drawings below.

Use (2) 5/16" x 3/4" bin bolts to attach bands to posts. Also use 5/16" x 3/4" bin bolts to join band sections. Note that band sections connect to each other only at endmost holes until completing the circle where an overlap may occur.

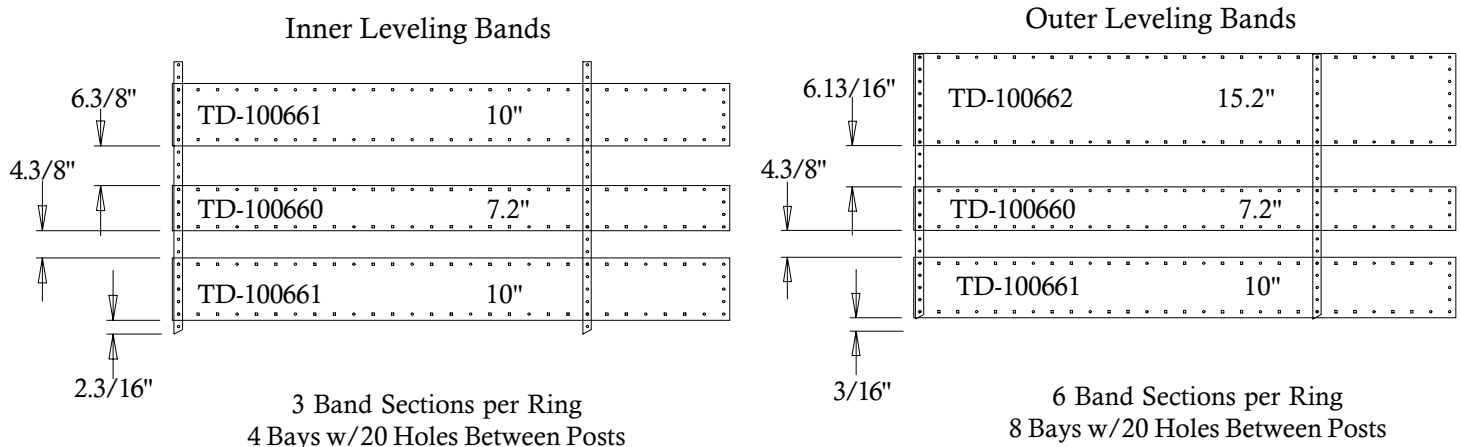

**Figure #34**

## PULLEY ASSEMBLY

Finish assembling the center collar by adding the cross channel.

Position the pulley assembly to the cross channel in the middle of the center collar assembly. Use a 3/8" x 1" hex head cap bolt to fasten assembly to the cross channel. Position the pulley in the direction of the desired winch location on the sidewall.

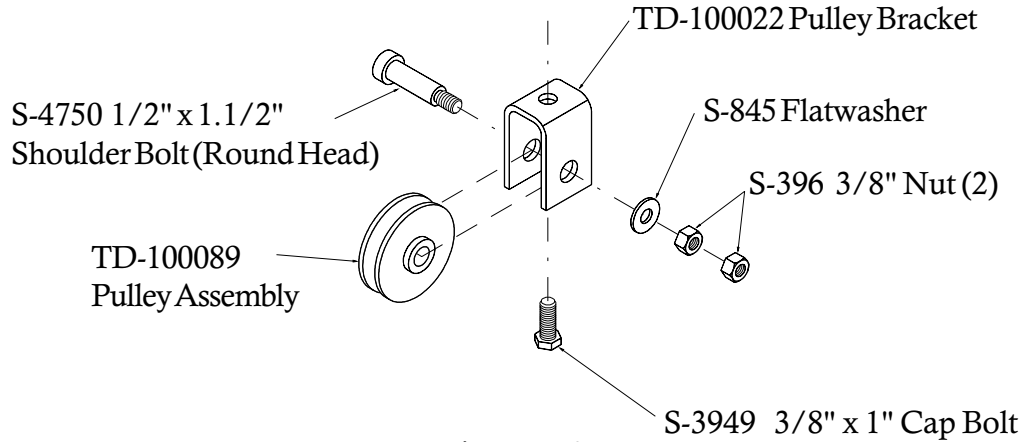


Figure #35

Field drill (5) 3/8" diameter holes as shown at left. Attach the pulley assembly with 5/16" x 3/4" bolts with the neoprene on the inside of the bin.


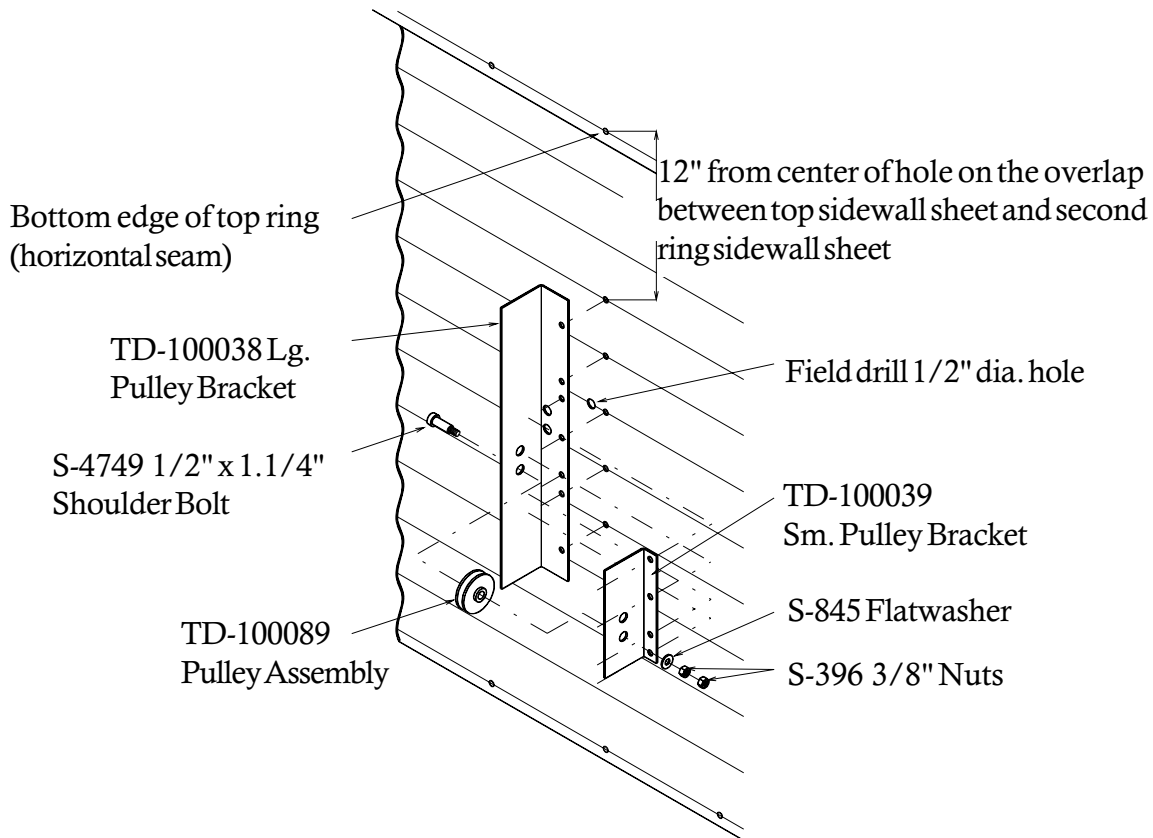


Figure #36

## DUMP CHUTE CHAIN ASSEMBLY


Attach all 24 dump chute chains directly to the lift plate as shown in diagram below.

Install all chains using "S" hooks (S-4692) to attach the chains to the dump chutes and lift plates. Keep excess chain at the lift plate. Adjust the chains until the chutes are approximately level when the lift plate is in the closed (up) position. Once the chains are uniformly adjusted, crimp the "S" hooks closed. Check when attaching the "s" hook to the end link on a chain that the end has not been cut open. If this is found remove the end link or shift up and use the next link in chain. The lift plate should be approximately 12" from the cross channel when the chutes are level.

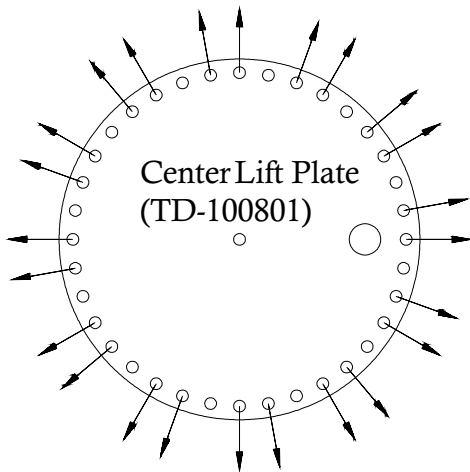

Chain leading to outer chutes  
(120") Adjust length as required  
TD-100199

Chutes in closed position

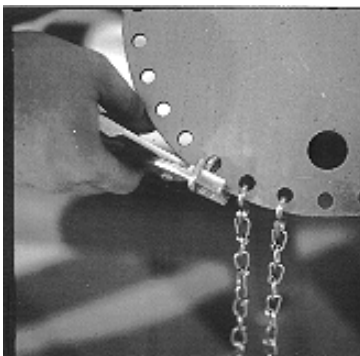

Crimp "S" hooks after final  
chute adjustment



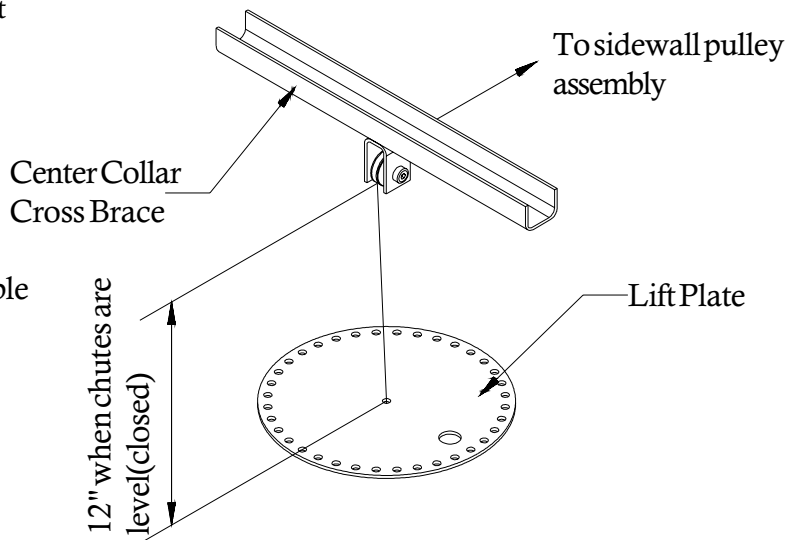


Figure #37


Note: Field cut rounded notches in the outer leveling band(s) where the two roof support channels hang from the roof ribs.

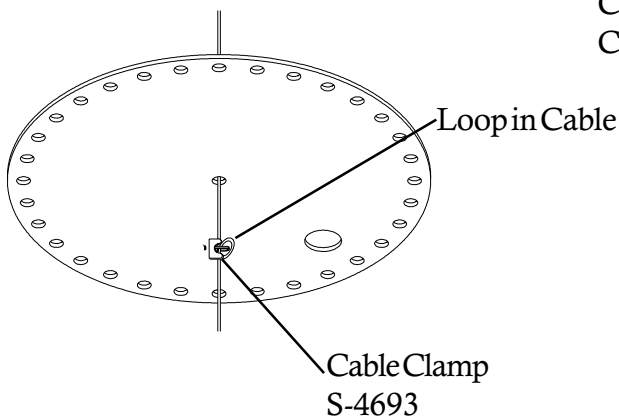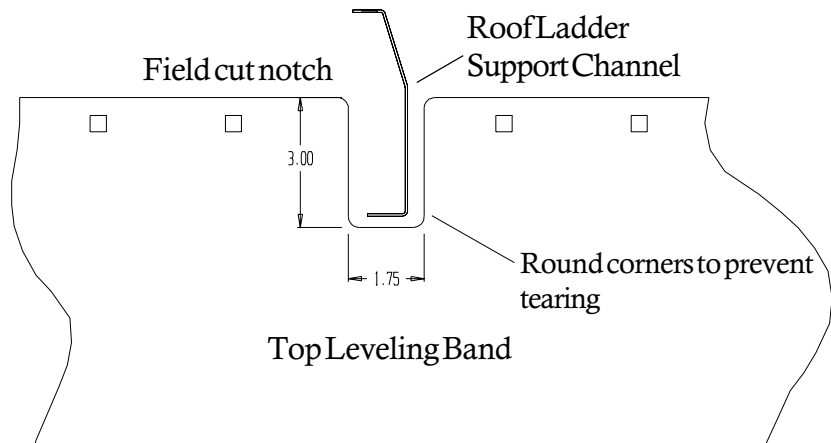

**Figure #38**

### WINCH ASSEMBLY

Complete erection of bin. Install winch as shown using 5/16" x 3/4" bin bolts to attach to the sidewall. The cable clamps from either side of the pulley on the cross channel should be removed and the dump chutes pulled tightly shut. Check for the uniformity of the chains on the dump chutes and readjust if needed. The downward travel of the chutes must be limited to prevent damage on new Top Dry bins. This can be done after the bin is complete and the cable stop bracket and clamp is set to indicate when the dump chutes are fully closed. Open the chutes until the cable clamp is about 30" above the cable stop bracket. Attach another cable clamp just below the small outside pulley bracket making sure it is tight.

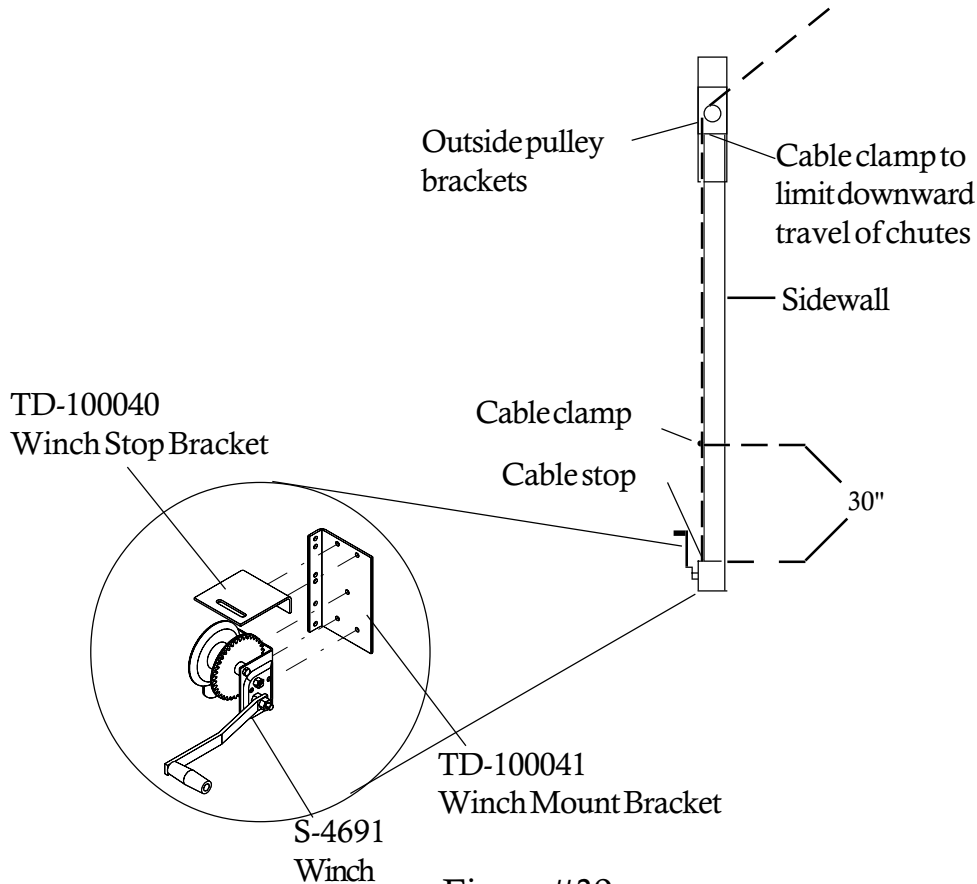

**Figure #39**



## FAN ENTRANCE SHEETS

24" thru 36" Fans

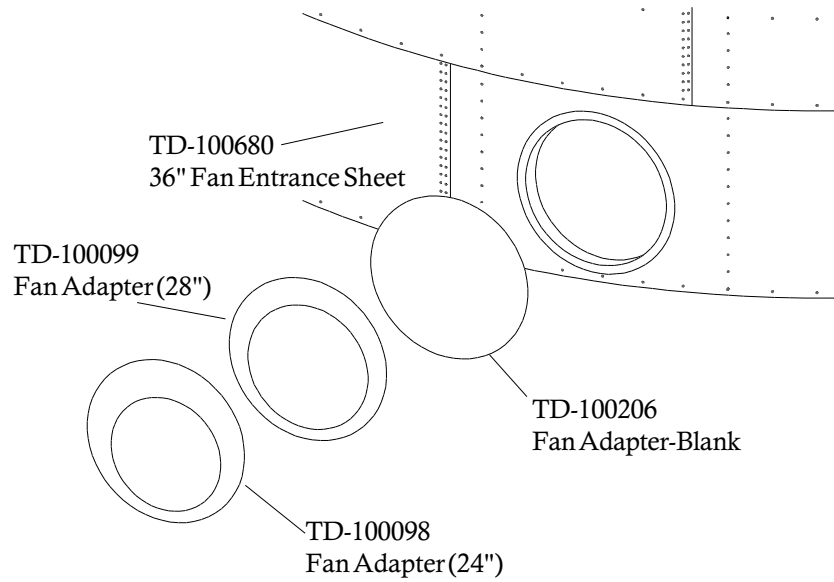


Figure #40

42" Fans


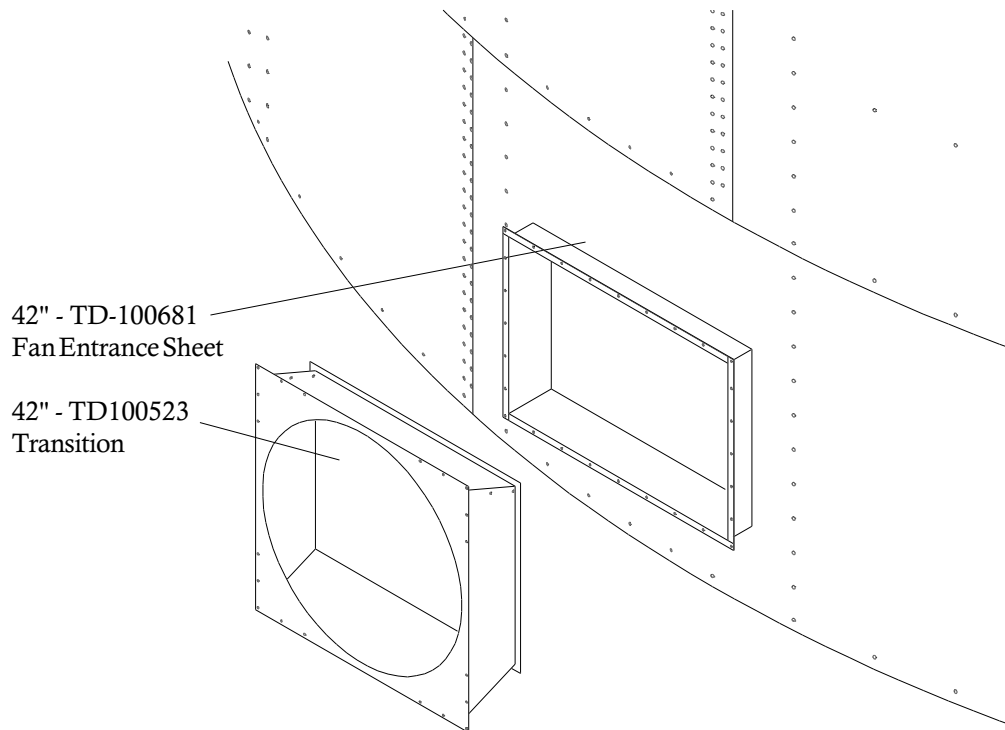


Figure #41

## ACCESS DOOR WELDMENT ASSEMBLY

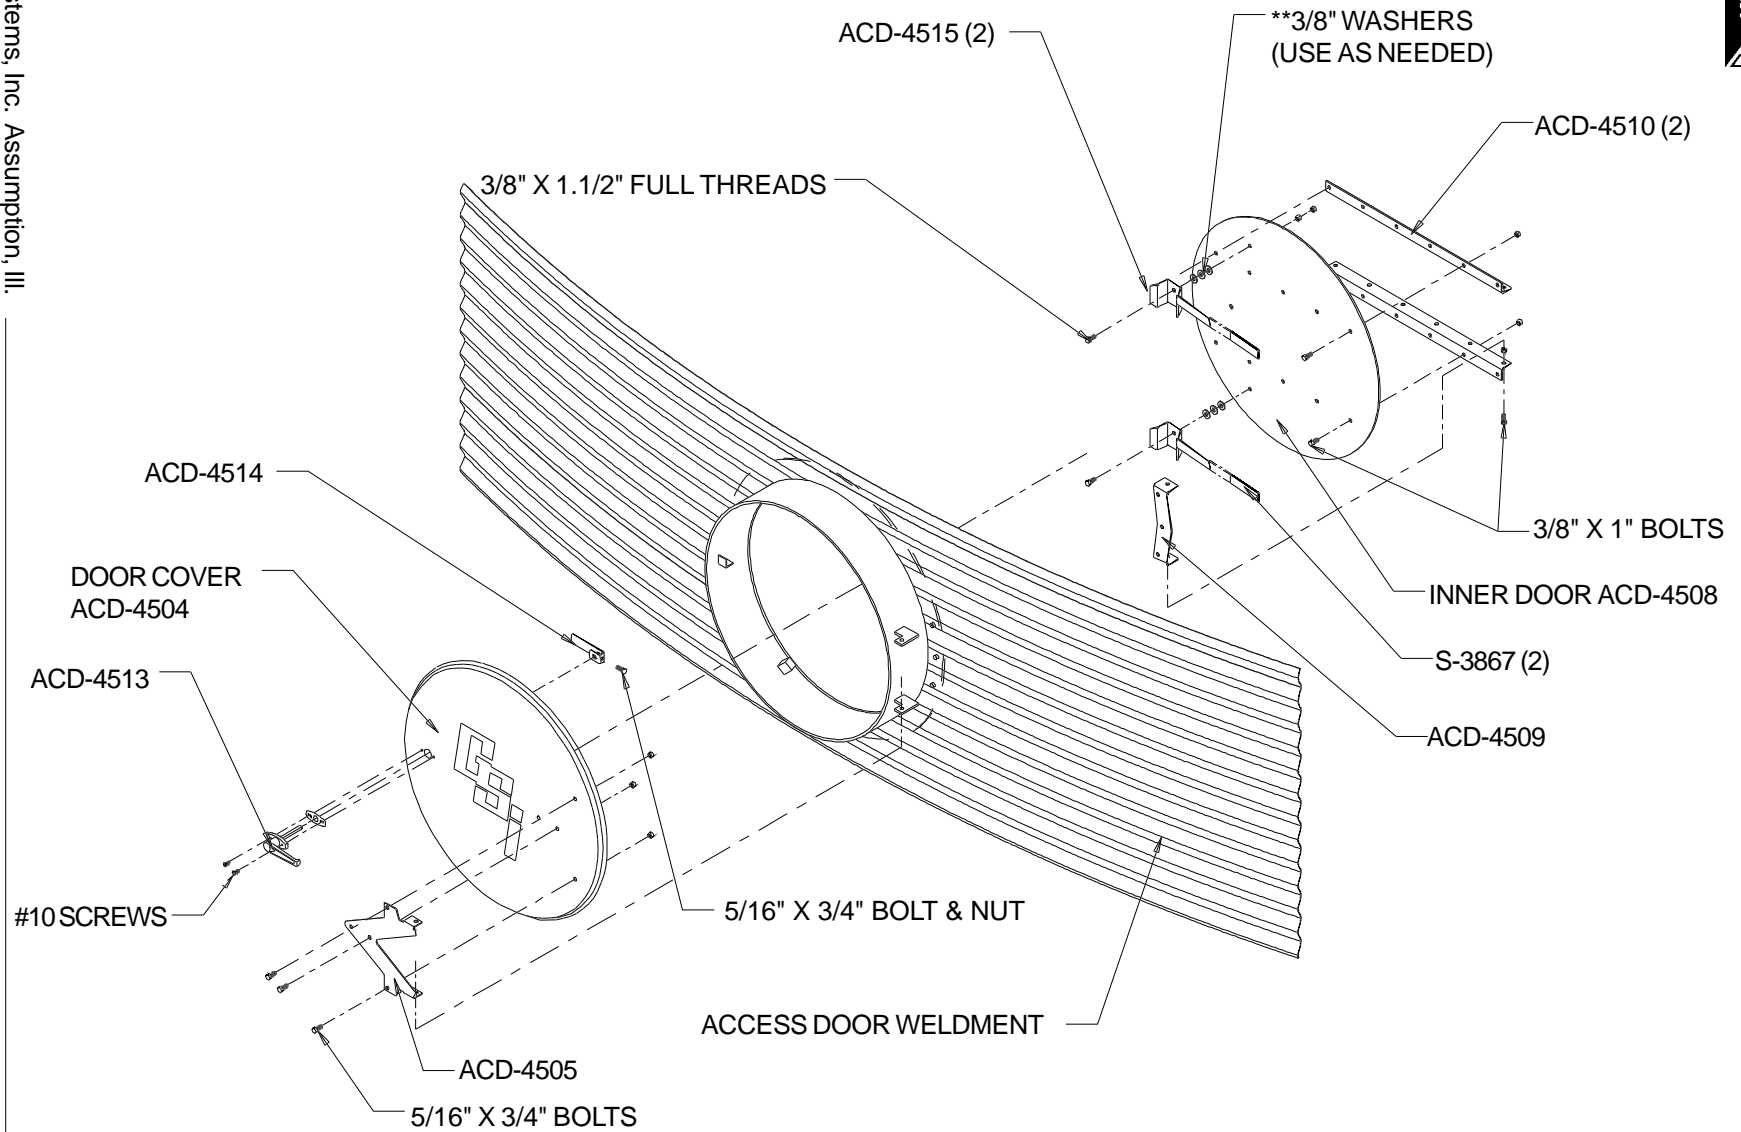

**\*\*THE QUANTITY OF 3/8" WASHERS  
NEEDED MAY VARY DEPENDING ON  
THE SIDEWALL GAUGES.**

Figure #42

## LIFTING JACKS & BRACKETS

NOTE: The number of lifting jacks required is best determined by personal experience. Factors such as bin size, soil compaction, wind velocity, jack design, etc., are all to be considered when deciding how many to use. If in doubt, use one jack on every other stiffener. GSI recommends heavy duty jacks rated at 6,000 lbs. or more.

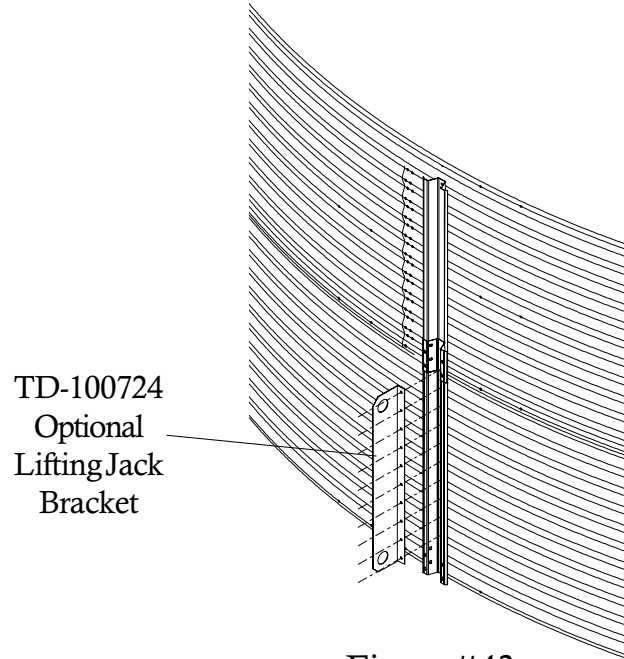


Figure #43

Remember to attach lifting brackets to the stiffeners. A special optional lifting bracket is available from G.S.I.

Anchor all jacks securely and raise the bin just high enough to assemble the next ring. When lifting your bin, raise all jacks at an equal rate. This will prevent the bowing of previously assembled rings and make for easier hole alignment. Bolt the next ring to the inside of the second ring. Be sure to stagger the sheets and select the proper gauge material. Lower the bin on the foundation after assembling and tightening the bolts on the new ring. Now rebolt the lifting straps, continue ring additions until you are ready for door installation.


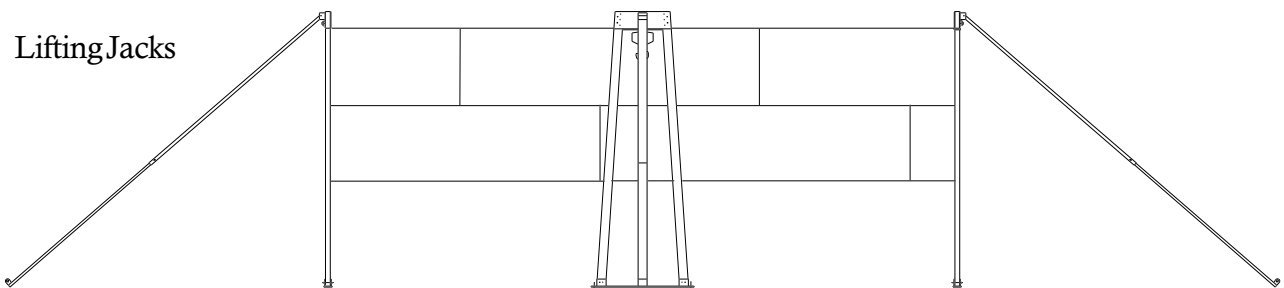



Figure #44



24' Manual Batch

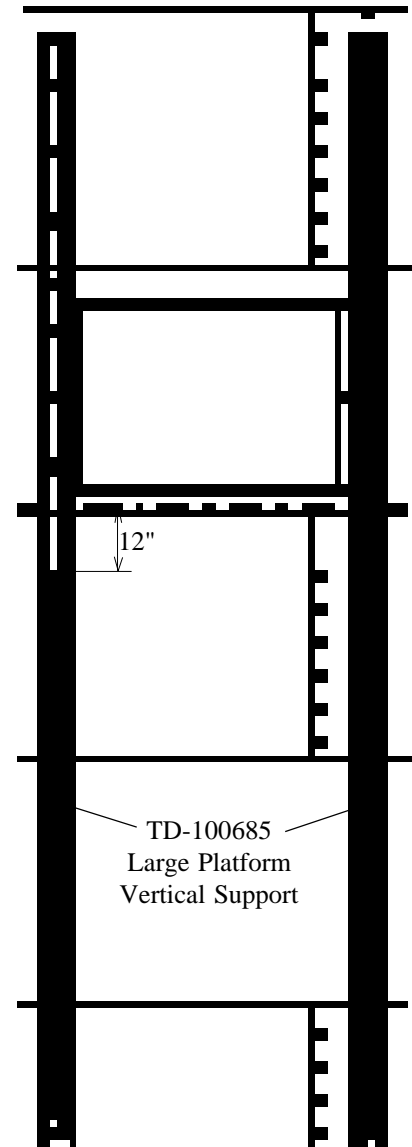

Large Platform  
(Optional)

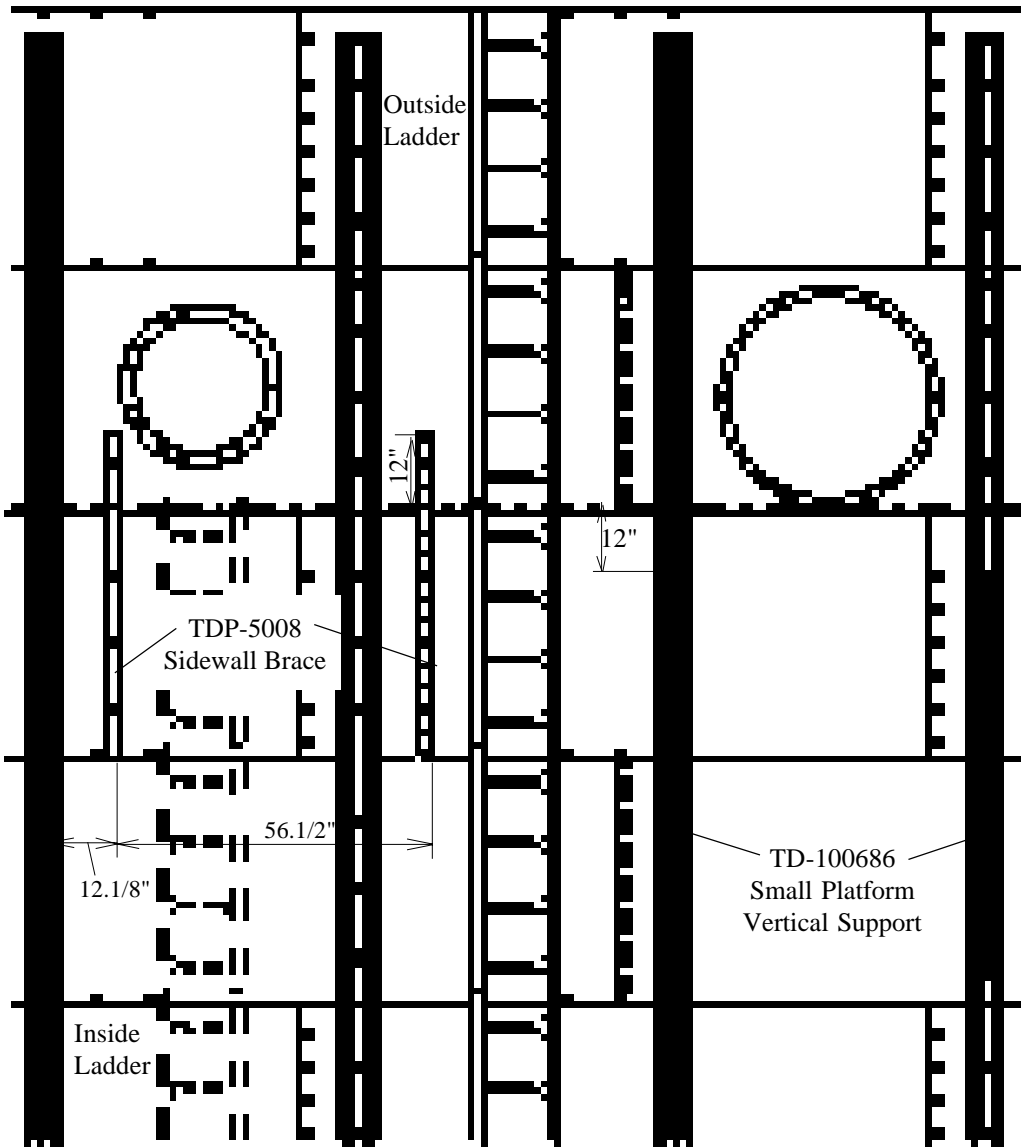

Access Door Platform

Small Platform  
(Optional)

Figure #45


## DETAILED LAYOUT FOR PROPER LOCATION OF PLATFORM

## ACCESS DOOR PLATFORM

Before assembly of any platform, read the entire instructions to assure proper placement and assembly.

Refer to Figure #45 for proper location of access door platform. Begin by assembling the access door platform support frame using 5/16" x 3/4" truss head bolts and nuts. When attaching platform vertical support to bin sidewall field drill (16) 3/8" diameter holes for each support spaced every 4". Be sure and use 5/16" x 3/4" bin bolt on vertical support to sidewall. Special attention should be taken when assembling the platform support that the support brace is placed correctly.

Now proceed to the platform floor. Align holes on platform floor with holes on platform support and bolt together using 5/16" x 3/4" truss head bolt and nuts. Next, assemble handrail posts, handrails, and handrail braces.

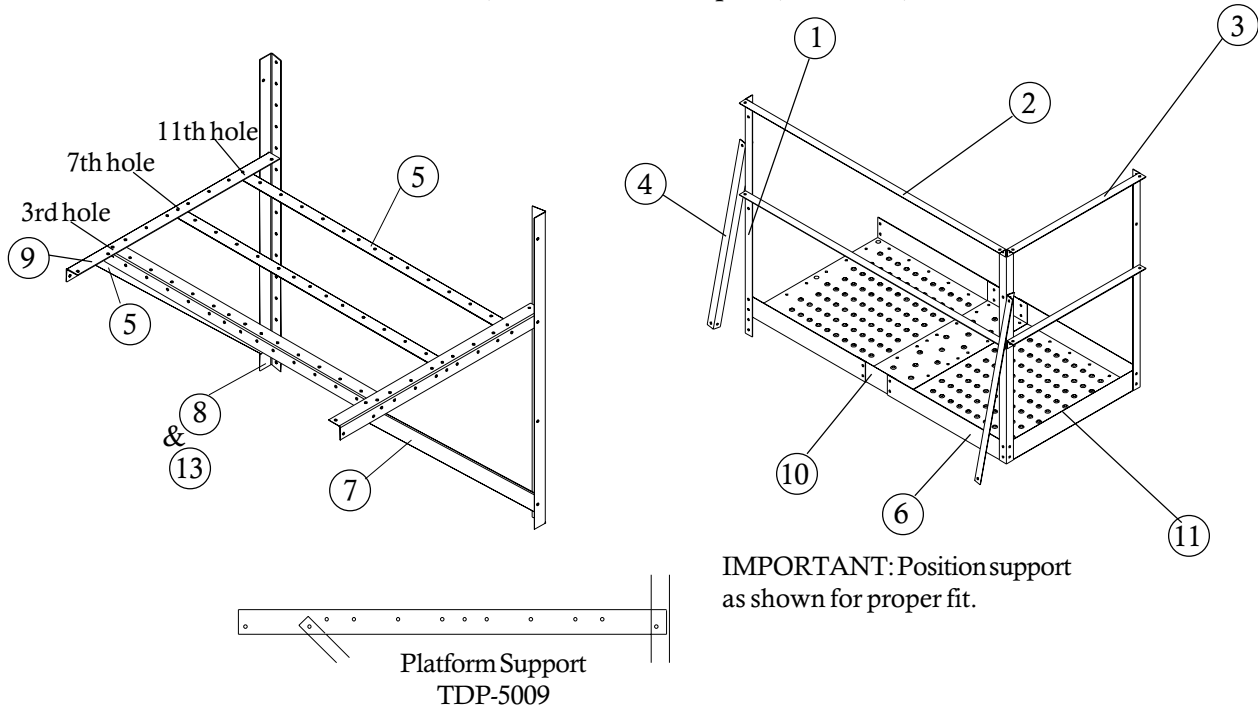

**Figure #46**

| Key | Part No.  | Description                   | Quantity | Weight |
|-----|-----------|-------------------------------|----------|--------|
| 1   | LS-371    | Platform Vertical Angle 42"   | 3        | 11.38  |
| 2   | TDP-5000  | Handrail 59"                  | 2        | 10.15  |
| 3   | TDP-5002  | Handrail 30"                  | 2        | 10.15  |
| 4   | TDP-5003  | Handrail Brace 36.29/32"      | 2        | 6.34   |
| 5   | TDP-5005  | Floor Brace 58.1/2"           | 3        | 26.11  |
| 6   | TDP-5006  | Platform Floor 37.7/8"        | 2        | 38.23  |
| 7   | TDP-5007  | Support Brace 50.21/32"       | 2        | 15.08  |
| 8   | TDP-5008  | Sidewall Brace 58"            | 2        | 19.65  |
| 9   | TDP-5009  | Platform Support 43.1/2"      | 2        | 12.95  |
| 10  | TDP-5010  | Platform Floor Splice 37.1/2" | 1        | 6.24   |
| 11  | TDP-5011  | Platform Toe Plate 29.3/4"    | 1        | 3.29   |
| 12  | TDP-5014  | Access Door Package Hardware  | 1        | 5.41   |
| 13  | TDP-5008N | Sidewall Brace 2.66"          | 2        | 16.61  |


## SMALL PLATFORM ASSEMBLY

For 36" Fans and Smaller or  
with #1 fan when two 36" or smaller fans are installed

Before assembling any platform, read all of the instructions first to assure proper placement and assembly.

Refer to Figure #45 for proper location of small platform. Begin by assembling the small platform support frame using 3/8" x 1" bolts on all connections. Use 5/16" x 1.1/4" bin bolt to attach platform vertical supports to sidewall stiffeners.

Be sure and locate the 5/16" x 1.1/4" bolts from the inside of the bin to the outside. This will provide maximum weather protection.

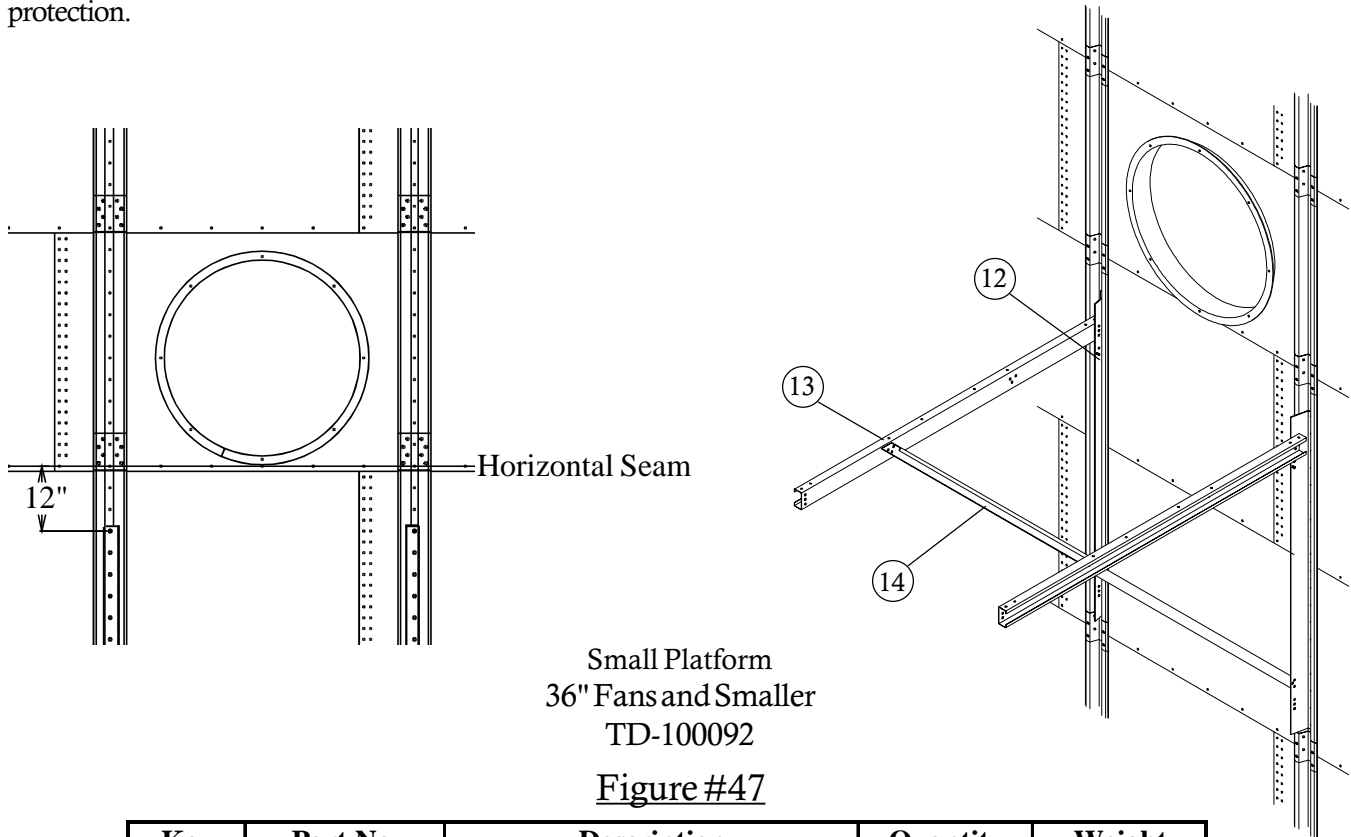

Small Platform  
36" Fans and Smaller  
TD-100092


Figure #47

| Key | Part No.  | Description                     | Quantity | Weight |
|-----|-----------|---------------------------------|----------|--------|
| 1   | TD-100051 | Channel Bracket                 | 8        | 3.90   |
| 2   | TD-100052 | Handrail Post 49.3/4"           | 4        | 31.69  |
| 3   | TD-100059 | Long Toeboard 78.1/2"           | 2        | 10.96  |
| 4   | TD-100060 | Short Toeboard 54.1/2"          | 1        | 3.80   |
| 5   | TD-100061 | Long Handrail 78.1/2"           | 4        | 37.52  |
| 6   | TD-100062 | Short Handrail 54.1/2"          | 2        | 13.02  |
| 7   | TD-100064 | Floor Plank 78"                 | 11       | 112.87 |
| 8   | TD-100066 | "X" Brace Strap 60"             | 4        | 7.26   |
| 9   | TD-100067 | Mid Channel Support 74"         | 2        | 32.73  |
| 10  | TD-100070 | Side Channel Support 78.1/2"    | 2        | 41.26  |
| 11  | TD-100072 | End Channel Support 78.1/2"     | 2        | 41.60  |
| 12  | TD-100686 | Vertical Support 70"            | 2        | 43.11  |
| 13  | TD-100083 | Support Channel 80.7/8"         | 2        | 32.98  |
| 14  | TD-100084 | Knee Brace 83.5/8"              | 2        | 23.67  |
| 15  | TD-100090 | Small Platform Hardware Package | 1        | 8.96   |


## SMALL PLATFORM ASSEMBLY

36" Fans and Smaller

TD-100092

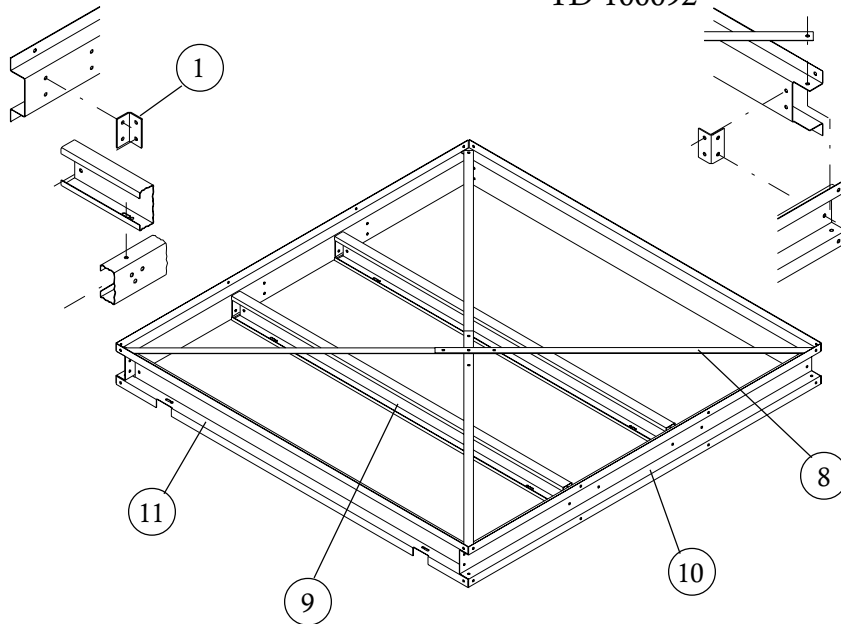

Position the vertical support to the existing sidewall stiffeners as shown in Figure #45 and double nut with 5/16" nuts.

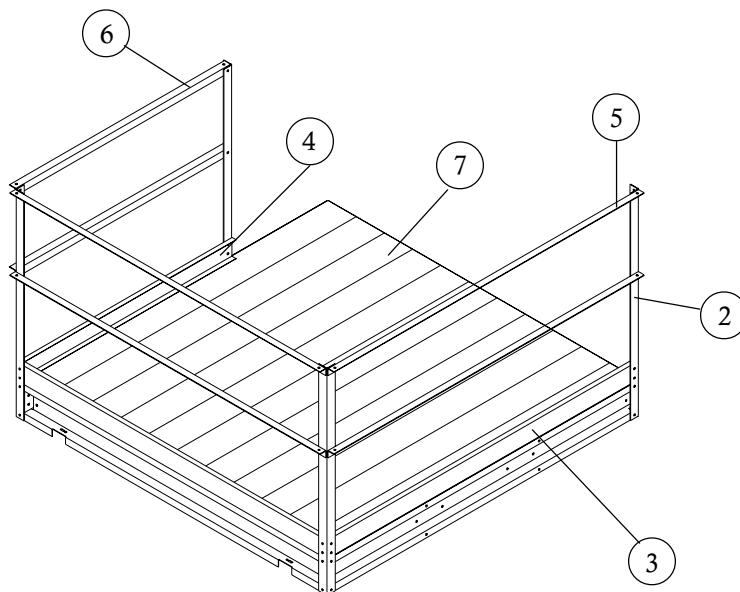

When bolting stiffener to sidewall at locations where platform supports are to be attached, use (25) 5/16" x 1.1/4" bin bolts, heads to inside. Start 12 inches below horizontal seam of second and third rings from top. See Figure #45.


Figure #48

## LARGE PLATFORM ASSEMBLY

For 42" Fan

Before assembly of any platform, read the entire instructions to assure proper placement and assembly.

Refer to Figure #45 for proper location of large platform. Begin by assembling the large platform support frame using 7/16" x 1" bolts on all connections. Use 5/16" x 1.1/4" bin bolt to attach the platform vertical supports to the sidewall stiffeners. Be sure and place the 5/16" x 1.1/4" bolts from the inside of the bin to the outside. This will provide maximum weather protection.

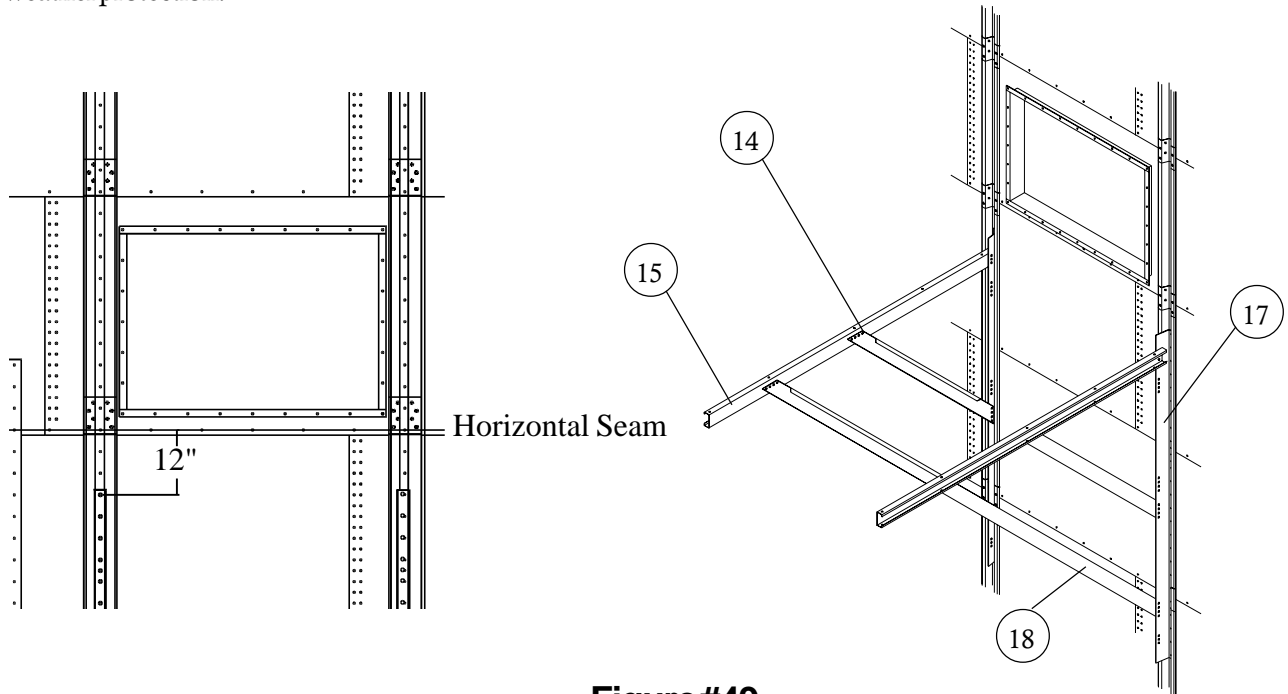


**Figure#49**


| Key | Part No.  | Description                     | Quantity | Weight |
|-----|-----------|---------------------------------|----------|--------|
| 1   | TD-100051 | Channel Bracket                 | 10       | 4.87   |
| 2   | TD-100052 | Handrail Post 49.3/4"           | 7        | 55.47  |
| 3   | TD-100053 | Toeboard 71.1/2"                | 1        | 4.99   |
| 4   | TD-100054 | Toeboard 92"                    | 1        | 6.42   |
| 5   | TD-100055 | Toeboard 95.1/2"                | 1        | 6.67   |
| 6   | TD-100056 | Handrail 71.1/2"                | 2        | 17.07  |
| 7   | TD-100057 | Handrail 92"                    | 2        | 22.98  |
| 8   | TD-100058 | Handrail 95.1/2"                | 2        | 22.81  |
| 9   | TD-100063 | Floor Plank 95.1/2"             | 13       | 163.35 |
| 10  | TD-100065 | "X" Brace Strap 94.5/16"        | 2        | 8.75   |
| 11  | TD-100068 | Mid Channel Support 88"         | 3        | 58.37  |
| 12  | TD-100069 | Side Channel Support 96"        | 2        | 50.46  |
| 13  | TD-100071 | End Channel Support 92.1/2"     | 2        | 49.15  |
| 14  | TD-100085 | Short Knee Brace 72.9/32"       | 2        | 54.51  |
| 15  | TD-100086 | Support Channel 98.3/8"         | 2        | 53.08  |
| 16  | TD-100087 | Long Knee Brace 114"            | 2        | 85.98  |
| 17  | TD-100685 | Vertical Support 94"            | 2        | 63.64  |
| 18  | TD-100091 | Large Platform Hardware Package | 1        | 14.35  |



## LARGE PLATFORM ASSEMBLY (FOR 1 FAN SYSTEMS OR #2 FAN ON 2 FAN SYSTEMS)

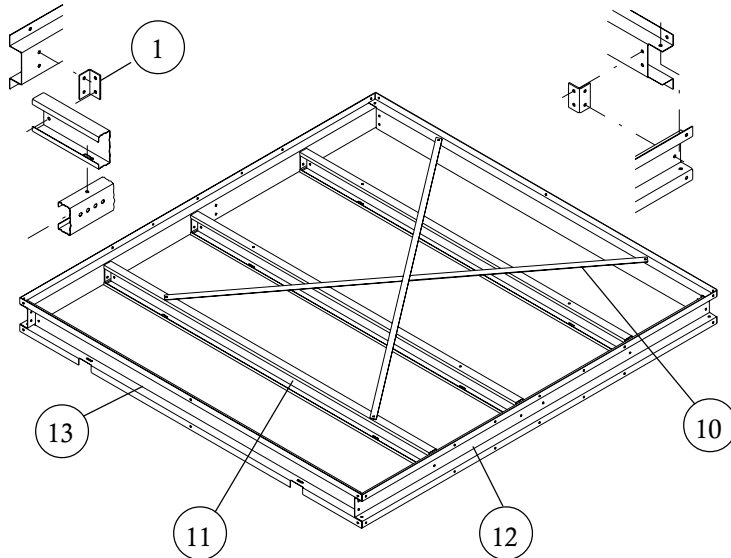

Position the vertical support to the existing sidewall stiffeners as shown in Figure #45 and double nut with 5/16" nuts.

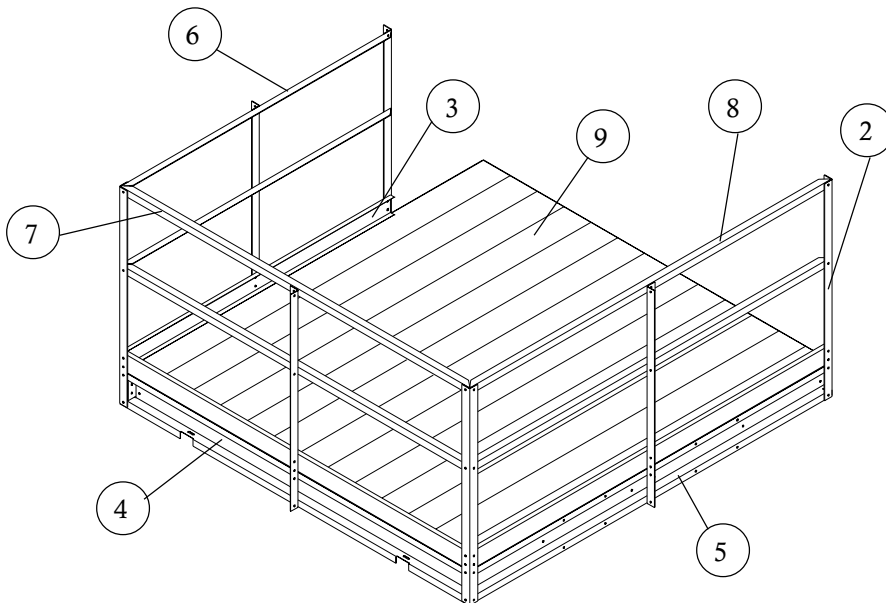

When bolting stiffener to sidewall at locations where platform supports are to be attached, use (25) 5/16" x 1.1/4" bin bolts, heads to inside. Start 12 inches below horizontal seam of second and third rings from top. See Figure #45.


**Figure #50**

## CROSS OVER PLATFORM ASSEMBLY (For use with stairs) TDP-5013

Before assembly of any platform, read the entire instructions to assure proper placement and assembly.

Refer to Figure #45 for proper location of cross over platform. Begin by assembling the cross over platform support frame using 5/16" x 3/4" truss head bolts and nuts. When attaching platform vertical support to bin sidewall field drill (16) 3/8" diameter holes for each support spaced every 4". Be sure and use 5/16" x 3/4" bin bolt on vertical support to sidewall. Special attention should be taken when assembling the platform support that the support brace is placed correctly.

Now proceed to the platform floor. Align holes on platform floor with holes on platform support and bolt together using 5/16" x 3/4" truss head bolt and nuts. Next, assemble handrail posts, handrails, and handrail braces.

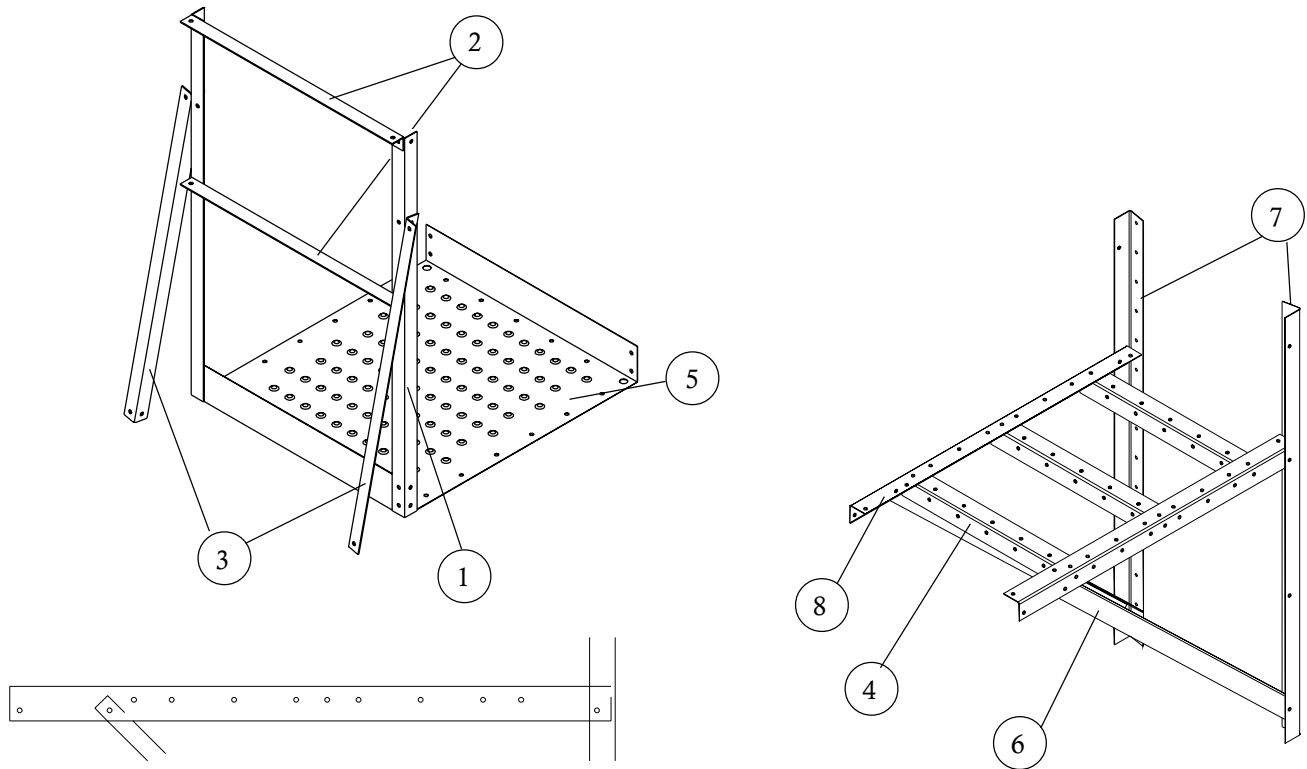

**Figure#51**

| Key | Part No. | Description                 | Quantity | Weight |
|-----|----------|-----------------------------|----------|--------|
| 1   | LS-371   | Platform Vertical Angle     | 2        | 7.59   |
| 2   | TDP-5001 | Handrail 27"                | 2        | 4.63   |
| 3   | TDP-5003 | Handrail Brace 36.29/32"    | 2        | 6.34   |
| 4   | TDP-5004 | Short Floor Brace 26.1/2"   | 3        | 11.85  |
| 5   | TDP-5006 | Platform Floor 37.7/8"      | 1        | 19.11  |
| 6   | TDP-5007 | Support Brace 50.21/32"     | 2        | 15.08  |
| 7   | TDP-5008 | Sidewall Brace 58"          | 2        | 19.65  |
| 8   | TDP-5009 | Platform Support 43.1/2"    | 2        | 12.95  |
|     | TDP-5015 | Cross Over Plat. Hdw. Pack. | 1        | 3.95   |

## PERFORATED CENTER BAND

Drill (6) 3/8" diameter holes equally spaced as shown above for top band clips. Attach clips using 5/16" x 3/4" bin bolts. Add perforated band sections. Note that these do not attach to the leveling bands but hang down on the inside of the top inner leveling band.


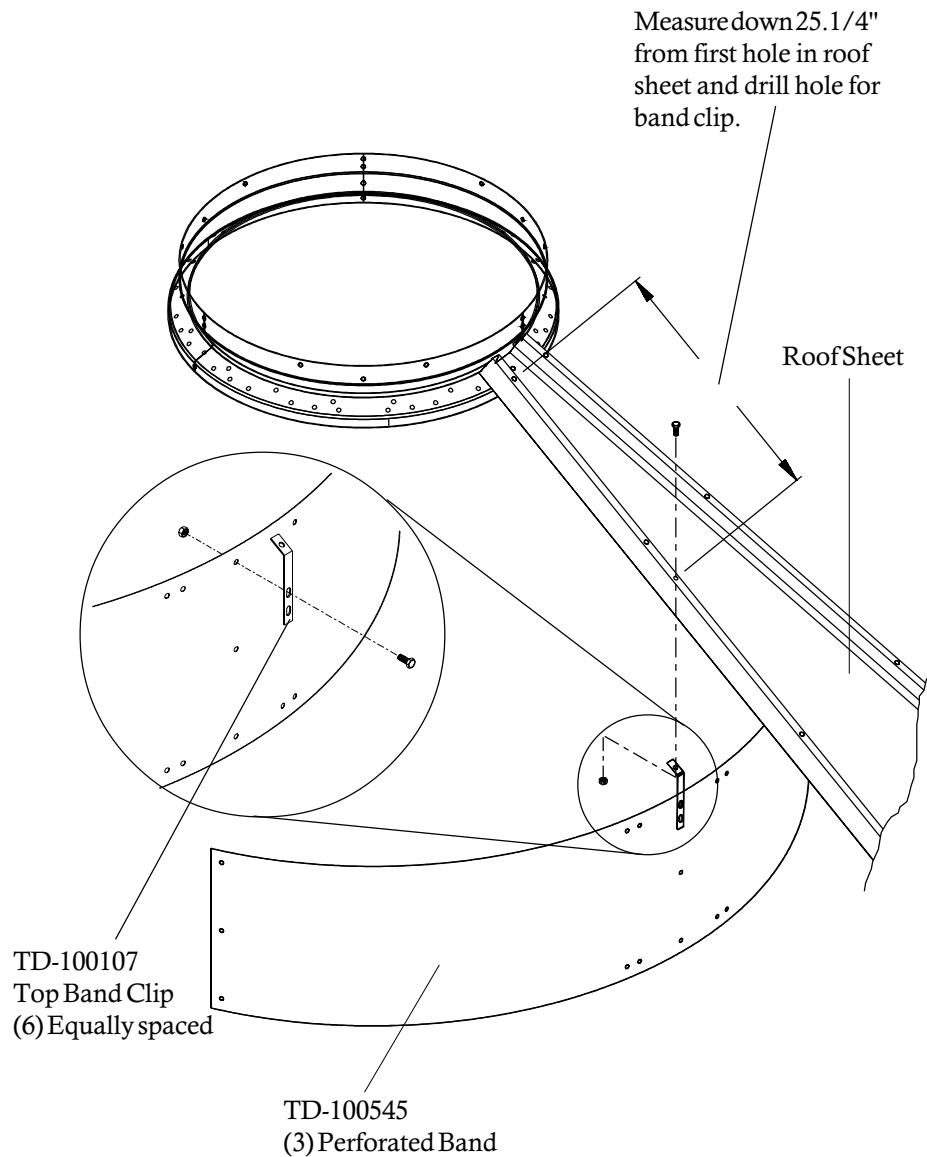


Figure #52


## OPTIONAL ROTARY SWITCH ROOF LOCATION

Overhead View of optional rotary Switch Location

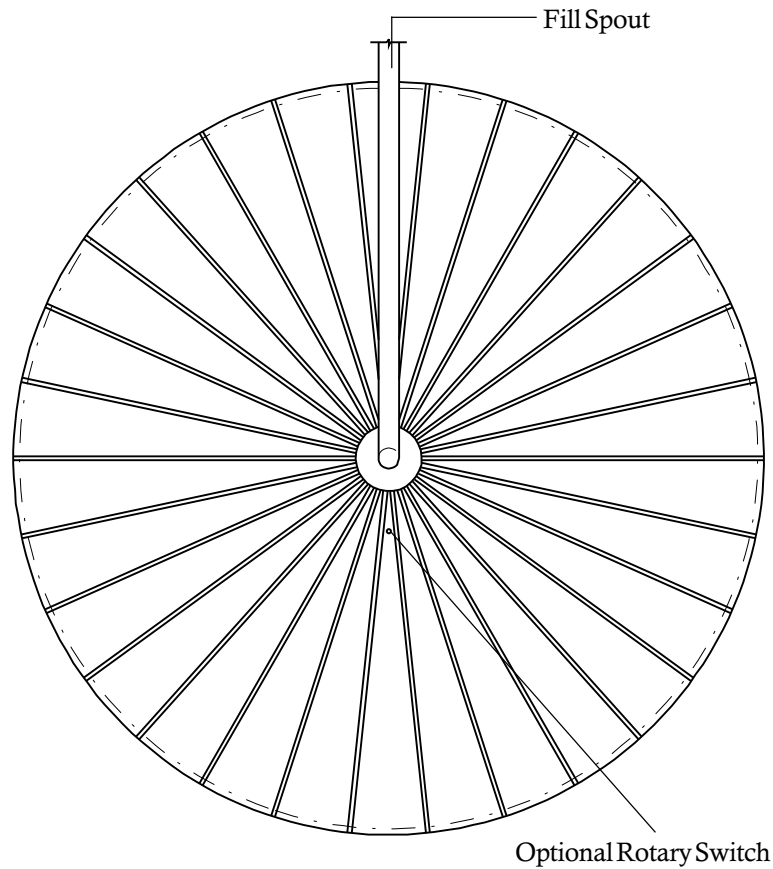

### ROTARY SWITCH PANEL LOCATION

Drill 2" diameter holes through roof panels at locations shown on previous page. Use a mounting plate as a pattern and drill (4) 3/8" holes through roof panels at each switch location so the plate can be bolted to the roof.

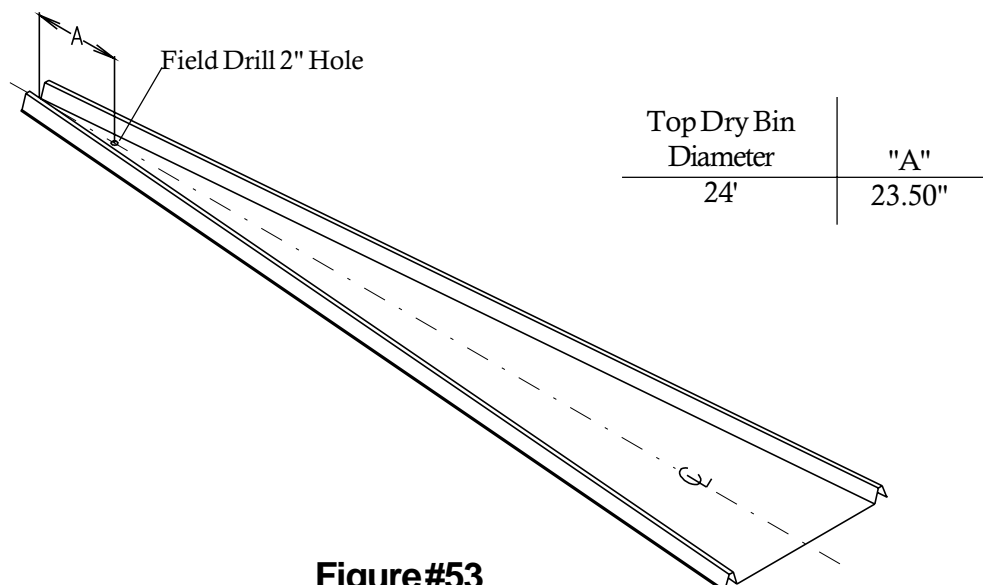


**Figure#53**

## OPTIONAL INSTALLATION OF ROOF-MOUNTED LEVEL SWITCH

Drill 2" diameter holes through roof panels at locations shown on previous page. Use a mounting plate as a pattern and drill (4) 3/8" holes through roof panels at each switch location so the plate can be bolted to the roof.

Attach flex-coupling to the power-pak and install roll pin. Apply teflon tape or pipe sealant (not included) to power-pak pipe threads and thread power-pak into mounting plate coupling. Conduit opening in power-pak should be at right angles to roof rib or face toward eave.

Caulk underside of mounting plate above and both sides of 2" hole. Bolt to roof panel.

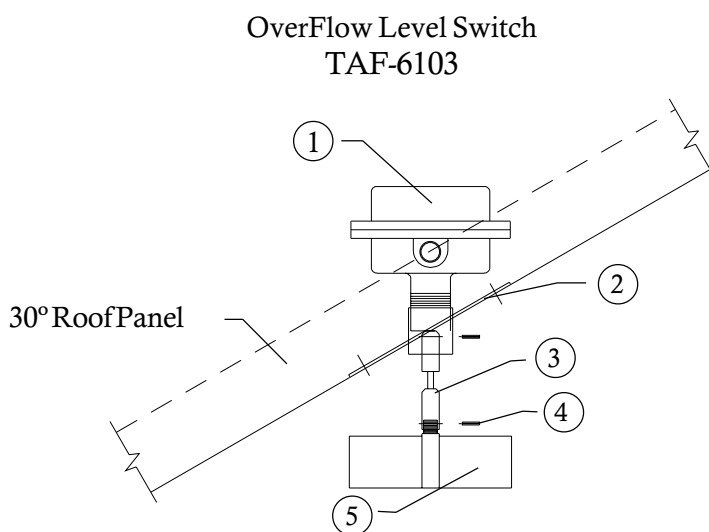

**Figure#54**

| Key | Part No.  | Description                  | Quantity | Weight |
|-----|-----------|------------------------------|----------|--------|
| 1   | TD-100076 | Rotary Switch Power-Pak      | 1        | 3.50   |
| 2   | TD-100627 | Roof Mount Coupling Weldment | 1        | 2.14   |
| 3   | TD-100075 | Flex-Coupling                | 1        | 0.50   |
| 4   | S-7241    | 1/8" x 1.1/4" Cotter Pin     | 2        | 0.02   |
| 5   | TAF-6086  | 3-Vane Paddle                | 1        | 0.75   |
| *   | TAF-6097  | Hardware Package             | 1        | 0.98   |
| --  | PNEG-300  | Rotary Switch Instructions   | 1        | 0.04   |
| --  | S-275     | 5/16" - 18 x 3/4" Bin Bolt   | 6        | 0.16   |
| --  | S-3651    | Tube Seal                    | 1        | 0.74   |
| --  | S-396     | 5/16" - 18 Hex Nut           | 6        | 0.06   |
| --  | S-7241    | 1/8" x 1.1/4" Cotter Pin     | 2        | 0.02   |

\* Hardware Package not shown

- Included in Hardware Package

## OPTIONAL INSTALLATION OF WALL-MOUNTED ROTARY SWITCHES

**IMPORTANT!** Wall mounted switch must be located at least 3' below the fan opening.

Drill 2" hole through wall 3' below the upper fan and heating unit(s). IF BIN IS 2.66" corrugation, hole should be centered on outside hill (see Figure at right.) IF BIN IS 4.00" corrugation, hole should be centered on outside valley.

Position mount plate (from inside), mark and drill 3/8" holes. Caulk coupling abundantly where it passes through the wall. Add foam weather strip around top and sides of plate then bolt to bin wall. Caulk coupling to wall from outside. Attach flex coupling to power-pak. Add teflon tape or pipe (sealant not included) to power-pak pipe threads and thread into coupling. Conduit opening should be horizontal or down. Add one-vane paddle.

Wall Mount Rotary Switch  
TAF-6106

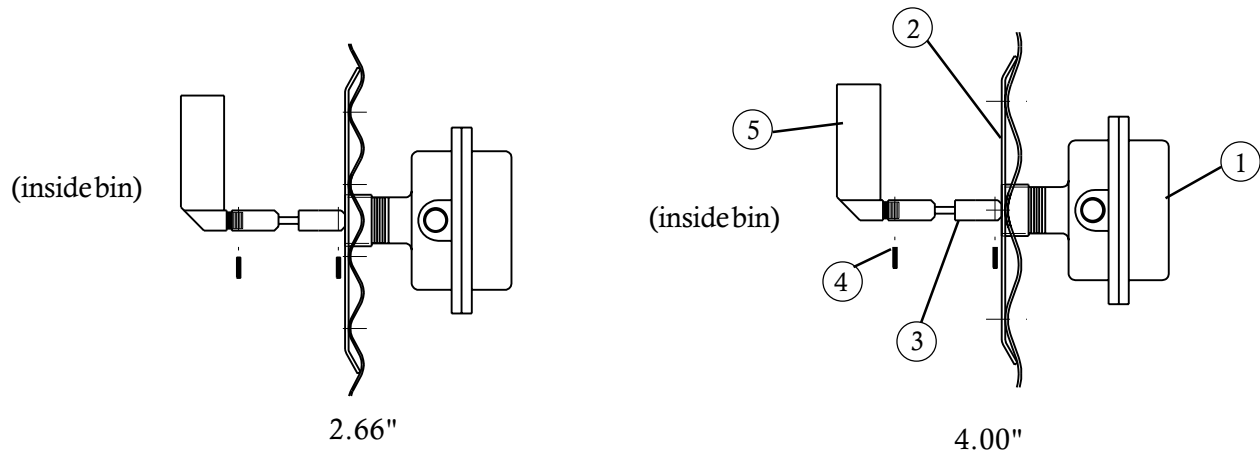


Figure #55

| Key | Part No.  | Description                  | Quantity | Weight |
|-----|-----------|------------------------------|----------|--------|
| 1   | TD-100076 | Rotary Switch Power-Pak      | 1        | 3.50   |
| 2   | TD-100629 | Roof Mount Coupling Weldment | 1        | 2.14   |
| 3   | TD-100075 | Flex-Coupling                | 1        | 0.50   |
| 4   | S-7241    | 1/8" x 1.1/4" Cotter Pin     | 2        | 0.02   |
| 5   | TAF-6085  | 1-Vane Paddle                | 1        | 0.75   |
| *   | TAF-6097  | Hardware Package             | 1        | 0.98   |
| --  | PNEG-300  | Rotary Switch Instructions   | 1        | 0.04   |
| --  | S-275     | 5/16" - 18 x 3/4" Bin Bolt   | 6        | 0.16   |
| --  | S-3651    | Tube Seal                    | 1        | 0.74   |
| --  | S-396     | 5/16" - 18 Hex Nut           | 6        | 0.06   |
| --  | S-7241    | 1/8" x 1.1/4" Cotter Pin     | 2        | 0.02   |

## TRANSITION INSTALLATION (TR-4734)

**BEFORE CUTTING THE OPENING CHECK THAT TR-4734 IS THE TRANSITION THAT WAS ORDERED.**

When installing the GSI aeration transition, it will be necessary to field cut a hole into the bottom sidewall ring (usually straight across from the unload auger). Refer to diagram for proper dimensions of cutout. The base angle will also need to be cut at entrance collar cutout. Take note of the diagram showing the 1" dimension from bottom of entrance collar side bracket to concrete. This is important for proper fit of transition.

NOTE: Entrance collar side bracket must be bolted on the inside of the bin sidewall.

### **AS VIEWED FROM INSIDE BIN**


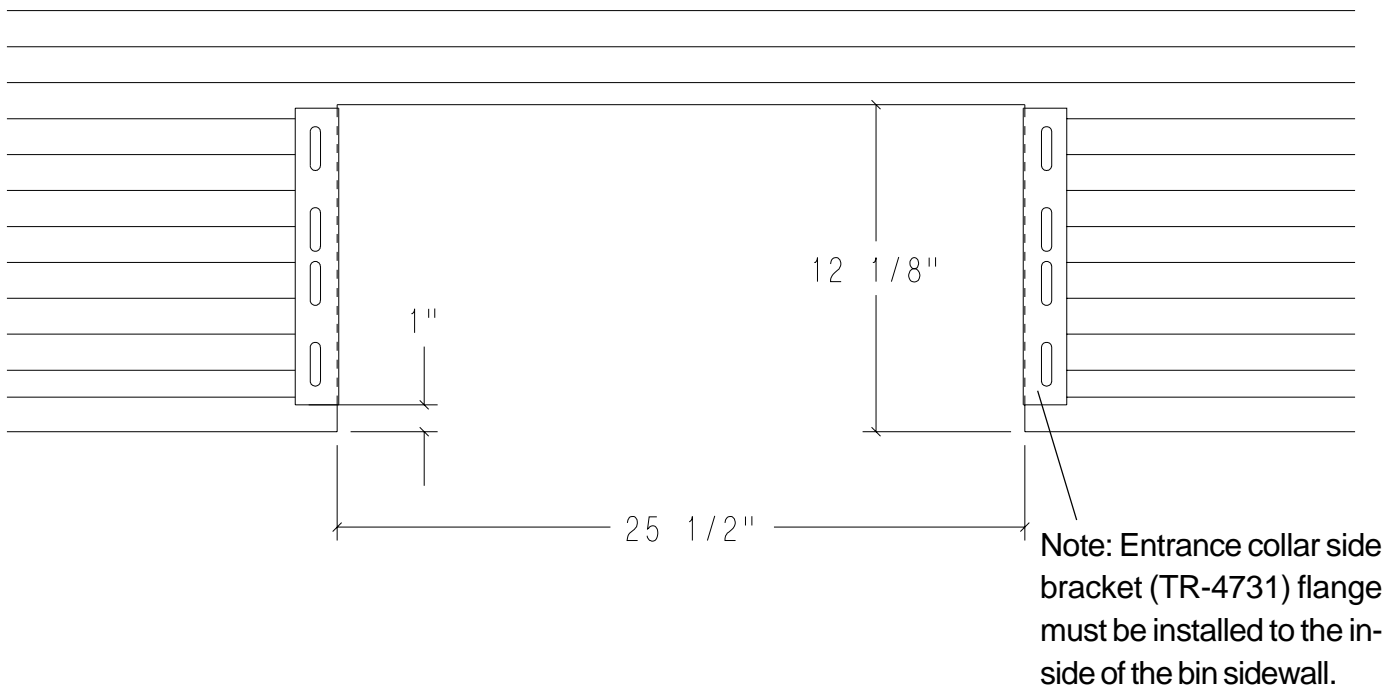


Figure #56

| Part No. | Description                      | Quantity |
|----------|----------------------------------|----------|
| S-275    | 5/16" - 18 3/4" Bin Bolt Grade 5 | 125      |
| S-280    | #10 - 16 x 5/8" Self Drill Screw | 10       |
| S-3651   | Tube Caulk - Gray Butyl #506-15  | 1        |
| S-396    | 5/16" - 18 Hex Nut Grade 2       | 125      |
| S-7264   | Spec Neoprene Seal Strip W/ADH   | 10 Ft    |

## TRANSITION ASSEMBLY TR-4734

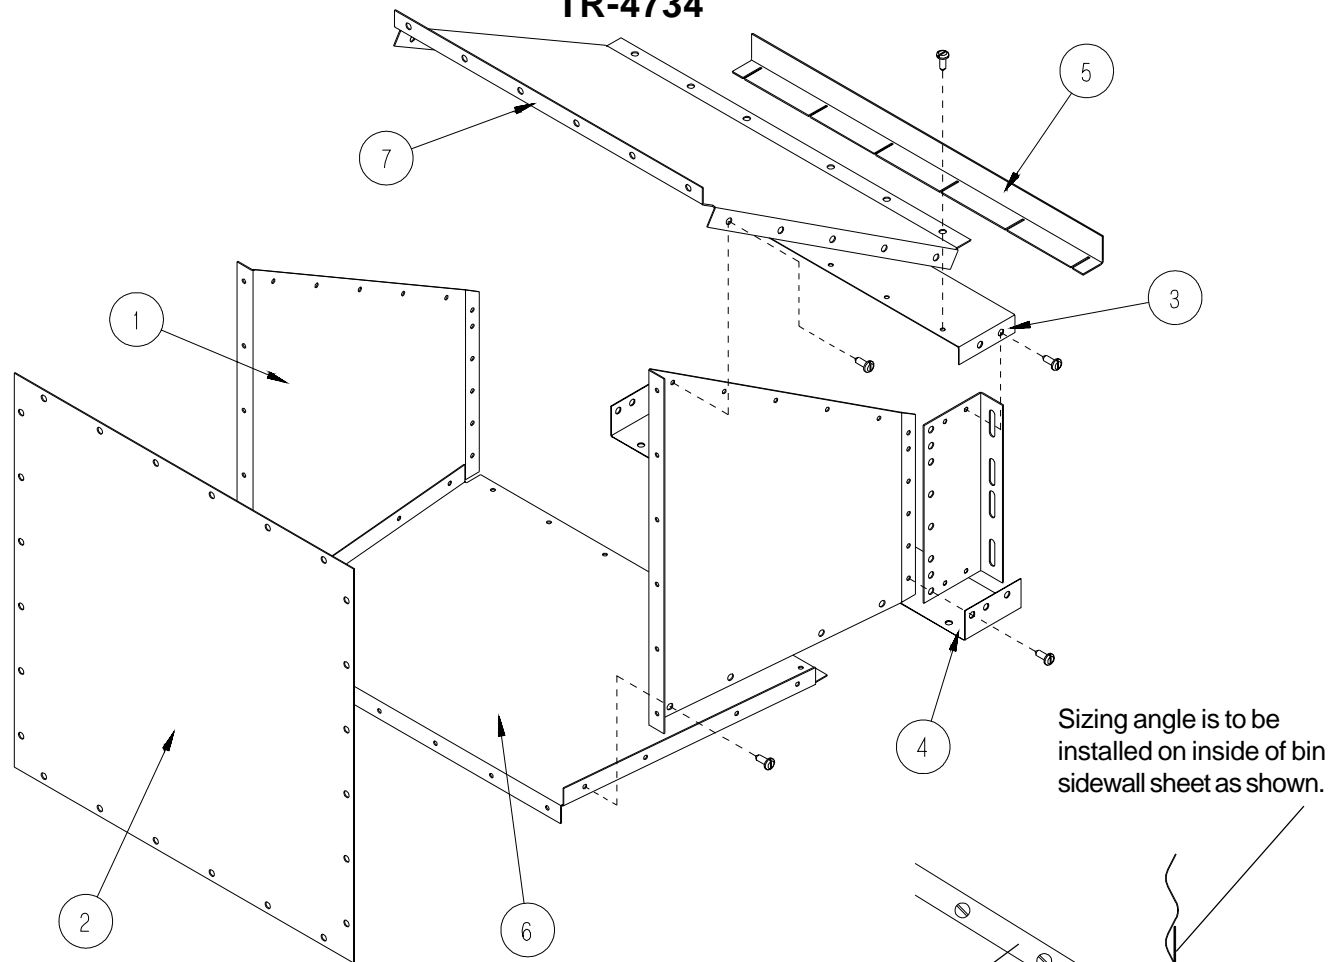

\* Hardware Package  
not shown

- Included in  
Hardware Package

The flanges on transition top are to  
go on the outside of transition sides.  
The flanges on transition bottom  
are to go on the inside of transition  
sides.

| Key | Part Number | Description                  |
|-----|-------------|------------------------------|
| 1   | TR-4724-1   | Transition side              |
| 1   | TR-4724-2   | Transition side              |
| 2   | TR-4767     | Transition faceplate         |
| 3   | TR-4726     | Top entrance collar piece    |
| 4   | TR-4727     | Bottom entrance collar       |
| 5   | TR-4728     | Sizing angle                 |
| 6   | TR-4729     | Transition bottom            |
| 7   | TR-4730     | Transition top               |
| 8   | TR-4731     | Entrance collar side bracket |

**Figure #57**



## TWO RING DOOR INSTALLATION INSTRUCTIONS

Before starting to install, be sure the correct door has been received.

### 4.00" Corrugation

WD-6133 24' Bins

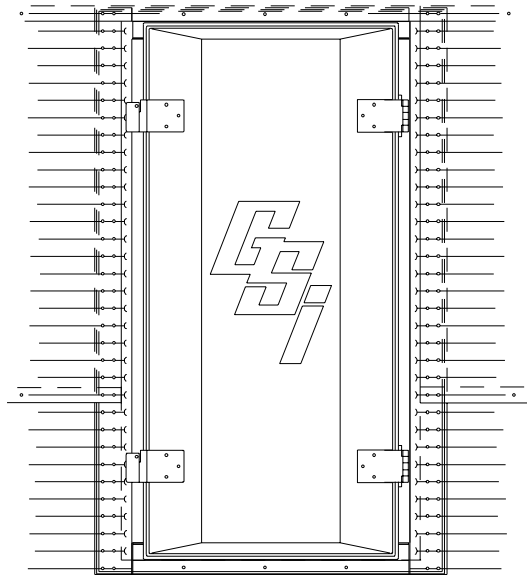


Figure #58

- 1.) Remove inner door panels, and outer door cover. Apply double row of rope caulk along door flanges, noting how door and bin sheets lap. The top of the door frame goes to the inside of the sidewall and the bottom of the door frame goes to the outside of the sidewall sheet. With inner door panels and outer door cover removed set door frame into opening. **Insert a bolt at the (4) corners of door frame and sidewall, do not tighten until completing step #2.**
- 2.) Reinstall inner door panels at original locations. Close latch bars to lock panels in place. Be sure that panels are fully seated over all bearing pins. Install inner panel hinge assemblies per illustration instructions with hinges. **Note: do not distort door frame with use of alignment or drift punches - if necessary, drill or ream holes to insert bolts in door frame. Now tighten frame bolts starting at center and working toward top and bottom on each side.**
- 3.) Keep inner panels latched and loosen all bearing pin bolts. Retighten all bearing pin bolts. This makes loading on pins uniform for easier operation of panels.
- 4.) If some latch bars are loose or require excessive force to lock, loosen hex socket capscrews and adjust in or out until latch bars operate smoothly. Check that the panels are fully seated over all bearing pins.
- 5.) Re-install outer cover. Adjust outer door hinges and latches as required.
- 6.) Assemble door hold back as shown on next page. Open door cover until it approaches the bin wall. Hook retaining bracket over lower latch mount and position the door hold back against bin wall in a valley. Drill a 3/8" hole through the bin wall and bolt the door hold back to the bin.

## 2-RING DOOR ASSEMBLY

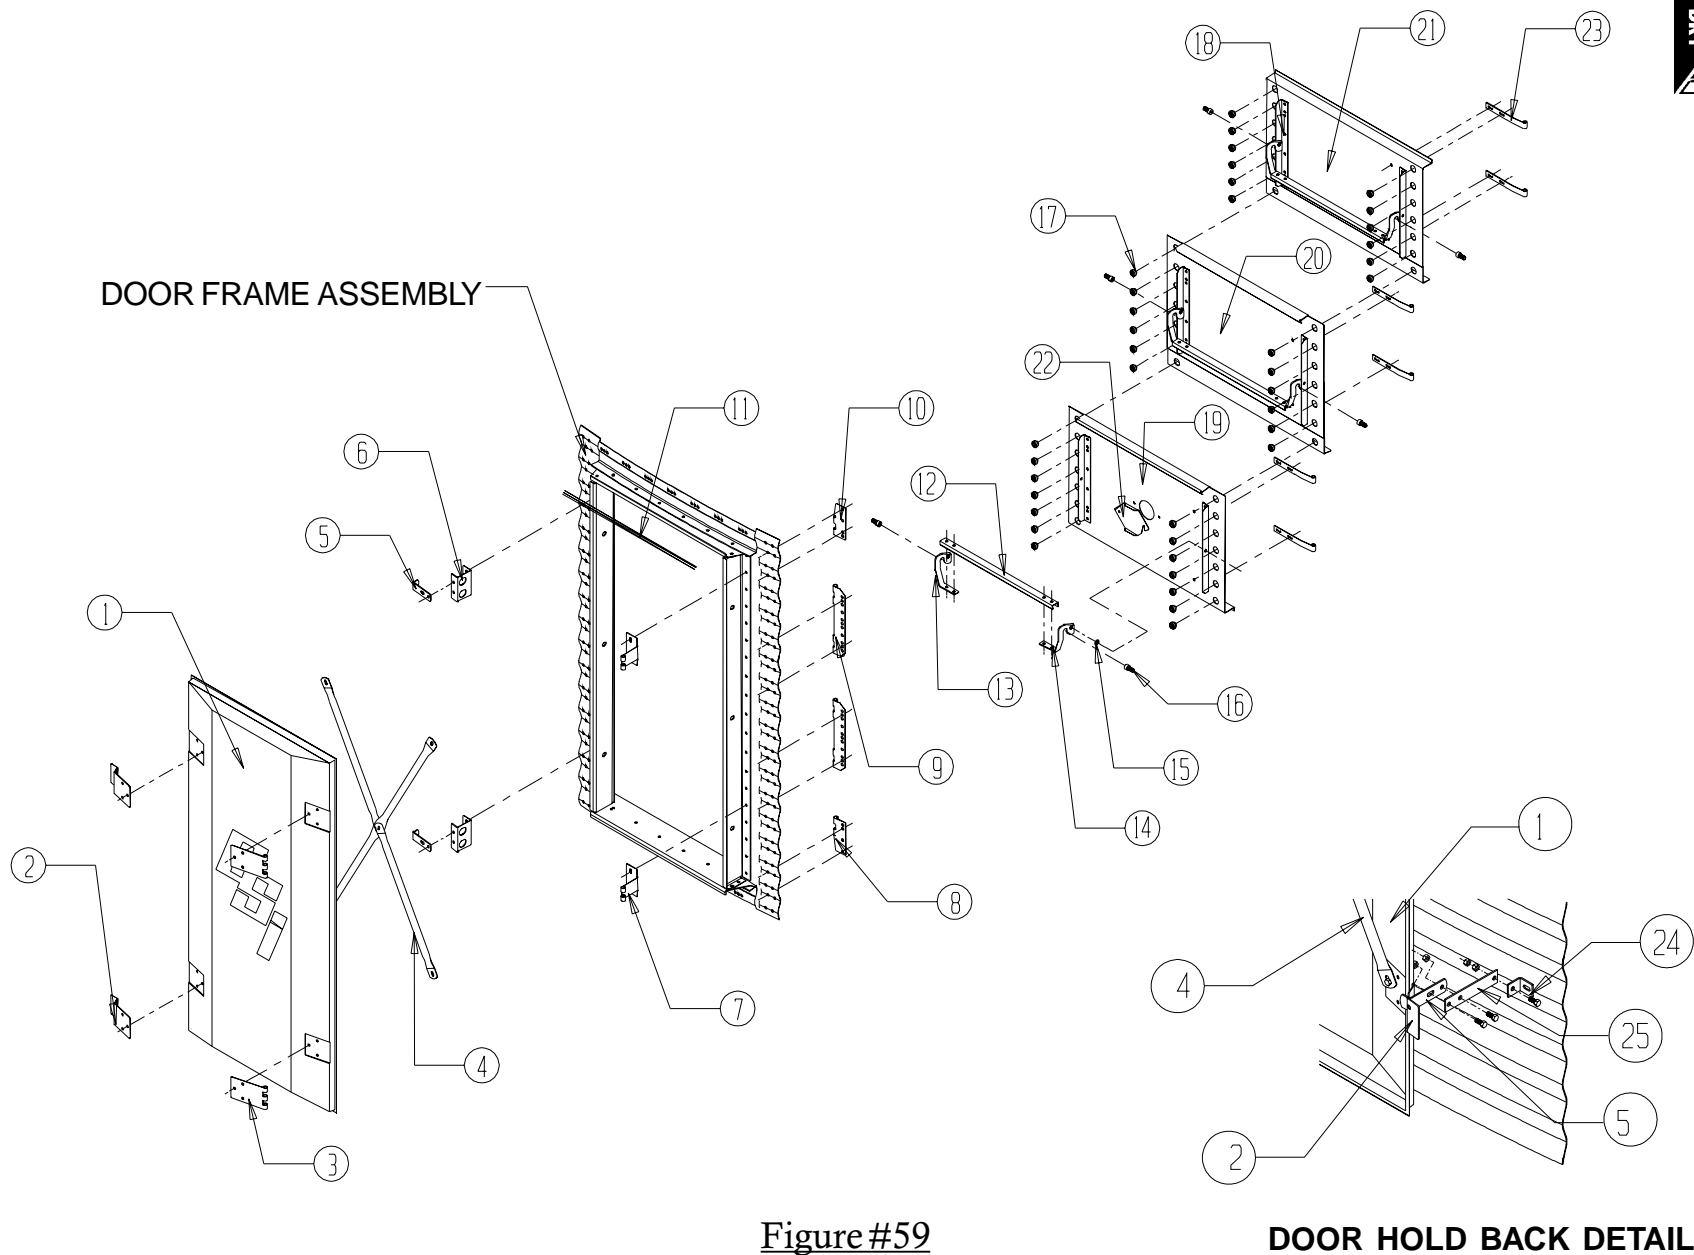


Figure #59


## PARTS LIST FOR 2-RING DOORS



24' Manual Batch

| KEY | DESCRIPTION                       | PART NUMBER      | PART NUMBER      | QUANTITY    | QUANTITY    |
|-----|-----------------------------------|------------------|------------------|-------------|-------------|
|     |                                   | 12'-27' BIN DIA. | 30'-60' BIN DIA. | 12'-27' BIN | 30'-60' BIN |
|     |                                   | 4.00" CORR.      | 4.00" CORR.      | DIAMETER    | DIAMETER    |
| 1   | OUTER DOOR COVER                  | WD-039           | WD-039           | 1           | 1           |
| 2   | OUTER COVER LATCH BRACKET         | WD-2854          | WD-2854          | 2           | 2           |
| 3   | OUTER COVER HINGE BRACKET         | WD-225           | WD-225           | 2           | 2           |
| 4   | DOOR COVER BRACE SECTION          | WD-035           | WD-035           | 4           | 4           |
| 5   | DOOR RETAINER                     | WD-033           | WD-033           | 3           | 3           |
| 6   | OUTER COVER LATCH MOUNT BASE      | WD-6124          | WD-6124          | 2           | 2           |
| 7   | OUTER COVER HINGE BASE            | WD-6066          | WD-6066          | 2           | 2           |
| 8   | BOTTOM INNER DOOR HINGE           | WD-6055          | WD-6055          | 1           | 1           |
| 9   | MIDDLE INNER DOOR HINGE           | WD-6056          | WD-6056          | 2           | 2           |
| 10  | TOP INNER DOOR HINGE              | WD-6054          | WD-6054          | 1           | 1           |
| 11  | RUBBER TRIM SEAL STRIP            | S-4380           | S-4380           | 2.1/4 FT.   | 2.1/4 FT.   |
| 12  | LATCH BAR                         | WD-6039          | WD-6039          | 3           | 3           |
| 13  | INNER PANEL LATCH - RIGHT HAND    | WD-6037          | WD-6037          | 3           | 3           |
| 14  | INNER PANEL LATCH - LEFT HAND     | WD-6038          | WD-6038          | 3           | 3           |
| 15  | 1/2" X 1" HEX SOCKET CAPSCREW     | S-7160           | S-7160           | 6           | 6           |
| 16  | LATCH BUSHING                     | WD-6040          | WD-6040          | 6           | 6           |
| 17  | LONG BEARING PIN                  | WD-6079          | WD-6079          | 38          | 38          |
| 18  | INNER PANEL REINFORCING ANGLE     | WD-6125          | WD-6125          | 6           | 6           |
| 19  | BOTTOM INNER DOOR PANEL           | WD-6128          | WD-6128          | 1           | 1           |
| 20  | MIDDLE INNER DOOR PANEL           | WD-6127          | WD-6127          | 1           | 1           |
| 21  | TOP INNER DOOR PANEL              | WD-6126          | WD-6126          | 1           | 1           |
| 22  | BOTTOM INNER DOOR PORT HOLE COVER | WD-6028          | WD-6028          | 1           | 1           |
| 23  | INNER DOOR HINGE STRAP            | WD-6053          | WD-6053          | 6           | 6           |
| 24  | DOOR HOLD BACK BRACKET            | WD-1302          | WD-1302          | 1           | 1           |
| 25  | DOOR HOLD BACK EXTENSION          | WD-6110          | WD-6110          | 1           | 1           |

## OPTIONAL BIN STEP ASSEMBLY

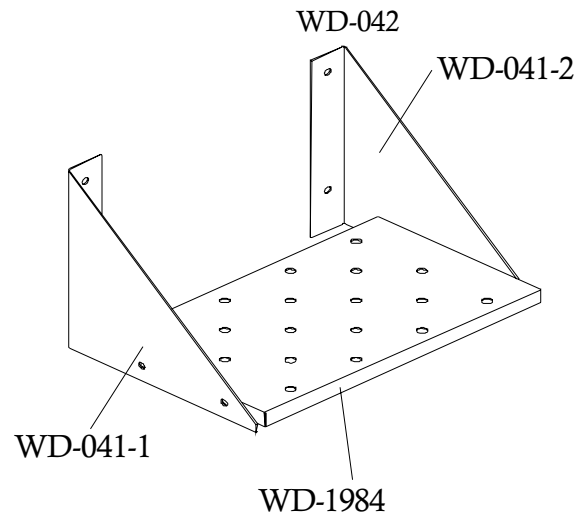

Field drill holes in sidewall  
sheet on ridge of corrugation.


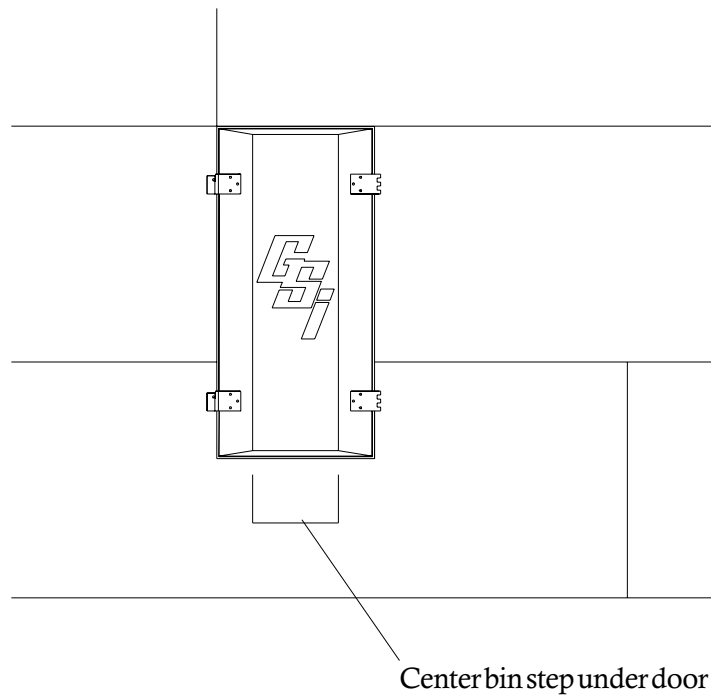


Figure #60

## BASE ANGLE

B-6753

Once the door frame has been placed and secured, continue adding necessary sidewall ring(s). To the lower edge of the bottom ring, attach the base angle ring. Before lowering the bin, apply mastic sealer to the entire underneath side of the base angle. (See below.) Next, lower the bin onto the foundation and check for an adequate seal.

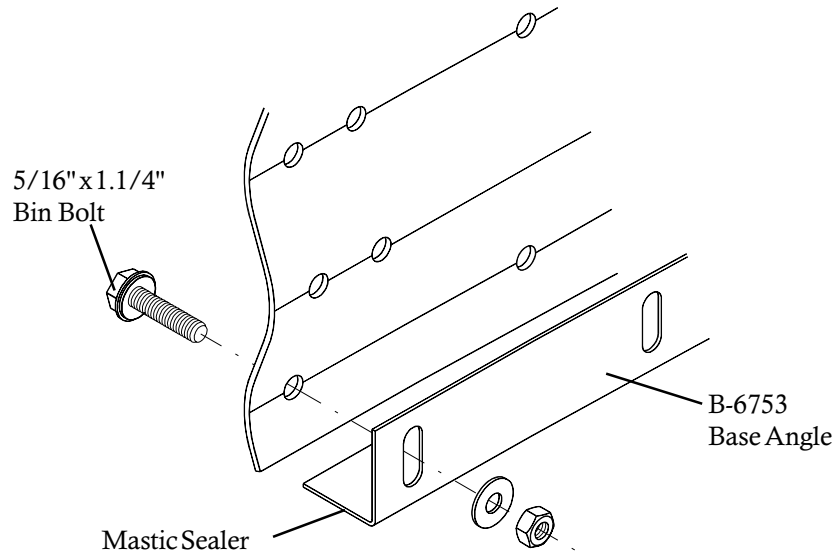

## BASE STIFFENER SHIM

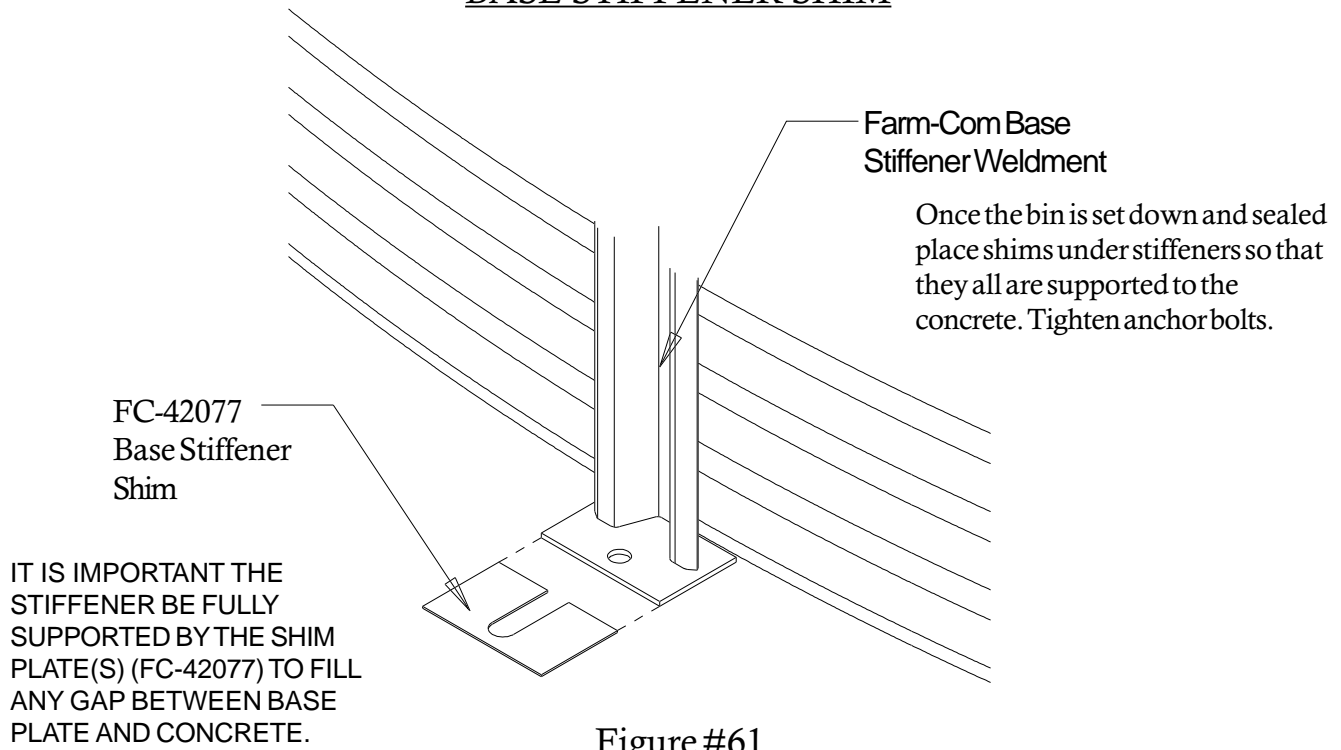


Figure #61